INDEXABLE HIGH FEED MILLS

HIGH FEED MILLING

>>>

	SBN10	SSN11	SPD09	SZD07	SZD09
	20°	18°	19°	–	–
	APMX [mm] 1.0	APMX [mm] 1.7	APMX [mm] 2.0	APMX [mm] 1.0	APMX [mm] 1.0
	DCX [mm] 16 – 42	DCX [mm] 32 – 125	DCX [mm] 32 – 140	DCX [mm] 16 – 32	DCX [mm] 25 – 66
Cylindrical shank	 DCX = 16 – 35 [mm]	 DCX = 32 – 35 [mm]	 DCX = 32 – 40 [mm]	 DCX = 16 – 25 [mm]	
Weldon					 DCX = 25 – 32 [mm]
Modular	 DCX = 16 – 40 [mm]	 DCX = 32 – 40 [mm]		 DCX = 16 – 32 [mm]	 DCX = 25 – 42 [mm]
Shell mill	 DCX = 40 – 42 [mm]	 DCX = 40 – 125 [mm]	 DCX = 42 – 140 [mm]		 DCX = 40 – 66 [mm]
Page	616	622	627	633	637
ISO	P M K S H	P M K S	P M K S H	P K H	P K H
Insert shape					
Inserts	BNGX 10T3 ANHX 10T3	SNGX 1104	PD.. 0905	ZDCW 0703	ZDCW 09T3
No. of cutting edges	4 / 2	8	5	4	4
Face milling	■	■	■	■	■
Helical interpolation	■	◪	■	◪	◪
Shallow shoulder milling	■	■	■	◪	◪
Plunge milling	■	■	■	◪	◪
Progressive plunging	■	◪	■	◪	◪
Ramping	■	◪	■		
Shape surfaces milling (copy milling)	■	■	◪	◪	◪
Shallow slot milling	◪	◪	◪	◪	◪

<<<

HIGH FEED MILLING

	SZD12					
	–					
	APMX [mm] 1.6					
	DCX [mm] 32 – 80					
	 DCX = 40 [mm]					
	 DCX = 32 – 40 [mm]					
	 DCX = 50 – 80 [mm]					
	📖 641					
	P K H					
						
	ZDEW 1204					
	4					
	■					
	◪					
	◪					
	◪					
	◪					
						
	◪					
	◪					

SBN10

P M K S H

PRAMET S

KAPR	20°
APMX	1.0 mm



High Feed Milling Cutter for BN.. 10 inserts with Internal Coolant, Next Generation

High-feed milling cutter for smaller diameters utilising double-sided BNGX 10 inserts with four cutting edges and APMX of 1 mm. Internal coolant. Suitable for a wide range of applications. Available in cylindrical, modular and arbor style in range of Ø16 up to Ø42 mm. Body treated for longer tool life.

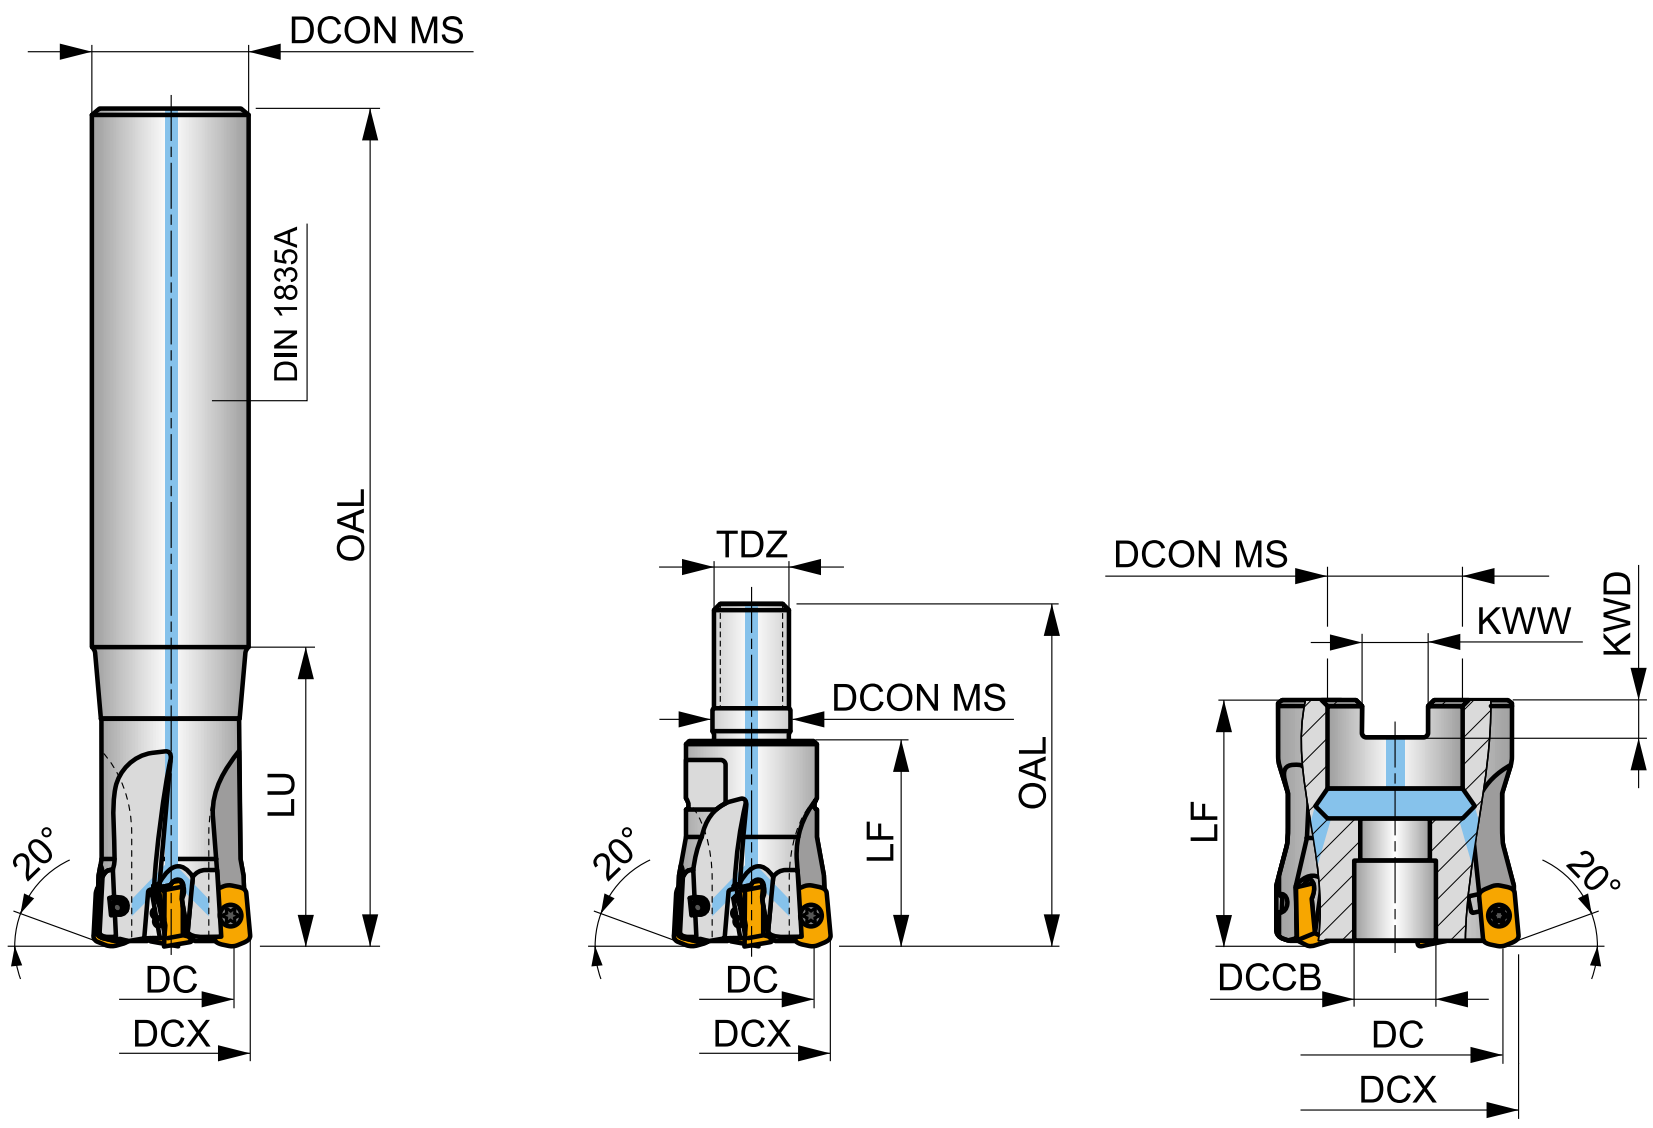

h_m 0.17 - 0.41

h_m 0.17 - 0.41

	Product	DCX	DC	OAL	DCON MS	DCCB	LU	LF	TDZ	KWW	KWD	GAMF	GAMP			max.		kg		
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[°]	[°]							
DIN 1835A	16E2R030A16-SBN10-C	16	9.4	100	16	–	30	–	–	–	–	-12	-10	2	✓	31100	✓	0.13	GI329	C0310
	16E2R050A16-SBN10-C	16	9.4	150	16	–	50	–	–	–	–	-12	-10	2	–	31100	✓	0.18	GI329	C0310
	16E2R030A14-SBN10-C	16	9.4	150	14	–	30	–	–	–	–	-12	-10	2	–	31100	✓	0.15	GI329	C0310
	18E2R030A16-SBN10-C	18	11.4	150	16	–	30	–	–	–	–	-11	-10	2	–	29200	✓	0.20	GI329	C0310
	20E3R040A20-SBN10-C	20	13.4	130	20	–	40	–	–	–	–	-10	-10	3	–	27700	✓	0.25	GI329	C0310
	20E3R080A20-SBN10-C	20	13.4	160	20	–	80	–	–	–	–	-10	-10	3	–	27700	✓	0.29	GI329	C0310
	20E3R040A18-SBN10-C	20	13.4	180	18	–	40	–	–	–	–	-10	-10	3	–	27700	✓	0.30	GI329	C0310
	20E4R040A20-SBN10-C	20	13.4	130	20	–	40	–	–	–	–	-10	-10	4	–	27700	✓	0.26	GI329	C0310
	25E4R050A25-SBN10-C	25	18.4	140	25	–	50	–	–	–	–	-9	-10	4	✓	24800	✓	0.42	GI329	C0310
	25E4R100A25-SBN10-C	25	18.4	180	25	–	100	–	–	–	–	-9	-10	4	✓	24800	✓	0.51	GI329	C0310
	25E4R050A22-SBN10-C	25	18.4	220	22	–	50	–	–	–	–	-9	-10	4	✓	24800	✓	0.54	GI329	C0310
	25E5R050A25-SBN10-C	25	18.4	140	25	–	50	–	–	–	–	-9	-10	5	–	24800	✓	0.42	GI329	C0310
	32E5R070A32-SBN10-C	32	25.4	150	32	–	70	–	–	–	–	-8	-10	5	✓	21900	✓	0.73	GI329	C0310
	32E6R070A32-SBN10-C	32	25.4	150	32	–	70	–	–	–	–	-8	-10	6	✓	21900	✓	0.73	GI329	C0310
	32E5R120A32-SBN10-C	32	25.4	200	32	–	120	–	–	–	–	-8	-10	5	✓	21900	✓	1.02	GI329	C0310
	35E5R050A32-SBN10-C	35	28.4	200	32	–	50	–	–	–	–	-7.5	-10	5	✓	21000	✓	1.08	GI329	C0310
	35E6R050A32-SBN10-C	35	28.4	200	32	–	50	–	–	–	–	-7.5	-10	6	✓	21000	✓	1.08	GI329	C0310
MODULAR	16E2R025M08-SBN10-C	16	9.4	43	8.5	–	–	25	M8	–	–	-12	-10	2	–	31100	✓	0.03	GI329	C0310
	18E2R025M08-SBN10-C	18	11.4	43	8.5	–	–	25	M8	–	–	-11	-10	2	–	29200	✓	0.06	GI329	C0310
	20E3R030M10-SBN10-C	20	13.4	49	10.5	–	–	30	M10	–	–	-10	-10	3	–	27700	✓	0.08	GI329	C0310
	20E4R030M10-SBN10-C	20	13.4	49	10.5	–	–	30	M10	–	–	-10	-10	4	–	27700	✓	0.08	GI329	C0310
	25E4R033M12-SBN10-C	25	18.4	55	12.5	–	–	33	M12	–	–	-9	-10	4	✓	24800	✓	0.08	GI329	C0310
	25E5R033M12-SBN10-C	25	18.4	55	12.5	–	–	33	M12	–	–	-9	-10	5	–	24800	✓	0.10	GI329	C0310
	28E5R035M12-SBN10-C	28	21.4	57	12.5	–	–	35	M12	–	–	-8.5	-10	5	✓	23400	✓	0.13	GI329	C0310
	32E5R040M16-SBN10-C	32	25.4	63	17	–	–	40	M16	–	–	-8	-10	5	✓	21900	✓	0.21	GI329	C0310
	32E6R040M16-SBN10-C	32	25.4	63	17	–	–	40	M16	–	–	-8	-10	6	✓	21900	✓	0.21	GI329	C0310
	35E6R043M16-SBN10-C	35	28.4	66	17	–	–	43	M16	–	–	-7.5	-10	6	✓	21000	✓	0.24	GI329	C0310

Product	DCX [mm]	DC [mm]	OAL [mm]	DCON MS [mm]	DCCB [mm]	LU [mm]	LF [mm]	TDZ	KWW [mm]	KWD [mm]	GAMF [°]	GAMP [°]			max.		kg		
MODULAR 40E6R043M16-SBN10-C	40	33.4	66	17	–	–	43	M16	–	–	-7	-10	6	✓	19600	✓	0.27	GI329	C0310
40E7R043M16-SBN10-C	40	33.4	66	17	–	–	43	M16	–	–	-7	-10	7	✓	19600	✓	0.26	GI329	C0310
ISO 6462 DIN 8030 40A05R-SMOBN10-C	40	33.4	–	16	14.1	–	40	–	8.4	5.6	-7	-10	5	✓	19600	✓	0.23	GI329	C0312
40A07R-SMOBN10-C	40	33.4	–	16	14.1	–	40	–	8.4	5.6	-7	-10	7	✓	19600	✓	0.27	GI329	C0312
42A05R-SMOBN10-C	42	35.4	–	16	14.1	–	40	–	8.4	5.6	-7	-10	5	✓	19100	✓	0.23	GI329	C0312
42A07R-SMOBN10-C	42	35.4	–	16	14.1	–	40	–	8.4	5.6	-7	-10	7	✓	19100	✓	0.26	GI329	C0312

GI329	BNGX 10T3...	ANHX 10T3..

		Nm					
C0310	US 42507-T07P	3.0	M 2.5	7	Flag T07P	–	–
C0312	US 42507-T07P	3.0	M 2.5	7	D-T07P/T09P	FG-15	HS 0830C

BNGX 10

PRAMET

	W1 [mm]	D1 [mm]	L [mm]	S [mm]
10T3	5.800	2.76	9.92	3.90

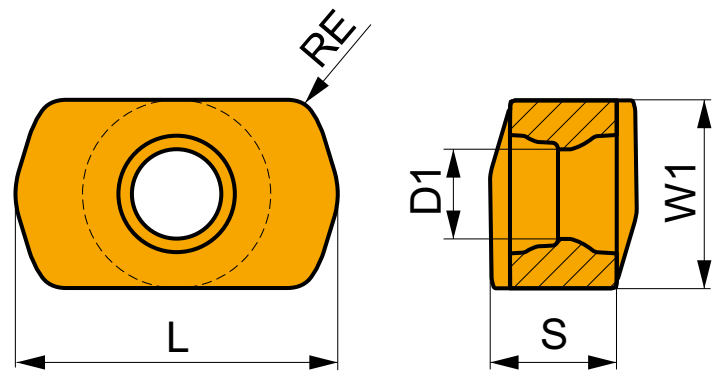

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



1 U S

M geometry with positive design for high feed machining.

Product		RE [mm]	P	vc [m/min]	f [mm/tooth]	ap [mm]	M	vc [m/min]	f [mm/tooth]	ap [mm]	K	vc [m/min]	f [mm/tooth]	ap [mm]	N	vc [m/min]	f [mm/tooth]	ap [mm]	S	vc [m/min]	f [mm/tooth]	ap [mm]	H	vc [m/min]	f [mm/tooth]	ap [mm]
BNGX 10T308SR-M	**8215**	0.8	■	240	0.65	0.7		–	–	–	■	225	0.65	0.7		–	–	–		–	–	–	◪	45	0.15	1.0
	M6330	0.8	■	210	0.65	0.7		–	–	–		–	–	–		–	–	–		–	–	–		–	–	–
	M8310	0.8	■	250	0.65	0.7		–	–	–	■	235	0.65	0.7		–	–	–		–	–	–	◪	50	0.15	1.0
	M8330	0.8	■	240	0.65	0.7		–	–	–	■	225	0.65	0.7		–	–	–		–	–	–	◪	45	0.15	1.0
	M8340	0.8	■	225	0.65	0.7		–	–	–	◪	210	0.65	0.7		–	–	–		–	–	–		–	–	–
	M8345	0.8	■	180	0.65	0.7		–	–	–		–	–	–		–	–	–		–	–	–		–	–	–
	M9325	0.8	■	275	0.65	0.7		–	–	–	■	260	0.65	0.7		–	–	–		–	–	–	◪	55	0.15	1.0

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



MM geometry with highly positive design for high feed machining.

Product	Grade	RE [mm]	P	vc [m/min]	f [mm/tooth]	ap [mm]	M	vc [m/min]	f [mm/tooth]	ap [mm]	K	vc [m/min]	f [mm/tooth]	ap [mm]	N	vc [m/min]	f [mm/tooth]	ap [mm]	S	vc [m/min]	f [mm/tooth]	ap [mm]	H	vc [m/min]	f [mm/tooth]	ap [mm]
BNGX 10T308SR-MM	**M6330**	0.8	◩	215	0.65	0.6	■	150	0.59	0.6		–	–	–		–	–	–	■	60	0.46	0.5		–	–	–
	M8310	0.8	◩	255	0.65	0.6	◩	130	0.59	0.6		–	–	–		–	–	–		–	–	–		–	–	–
	M8330	0.8	◩	245	0.65	0.6	■	145	0.59	0.6		–	–	–		–	–	–	◩	60	0.46	0.5		–	–	–
	M8340	0.8	◩	230	0.65	0.6	■	135	0.59	0.6		–	–	–		–	–	–	■	55	0.46	0.5		–	–	–
	M8345	0.8	◩	180	0.65	0.6	■	105	0.59	0.6		–	–	–		–	–	–	■	45	0.46	0.5		–	–	–
	M9325	0.8	◩	280	0.65	0.6		–	–	–		–	–	–		–	–	–		–	–	–		–	–	–
	M9340	0.8	◩	250	0.65	0.6	■	150	0.59	0.6		–	–	–		–	–	–	■	60	0.46	0.5		–	–	–



HM geometry with strong design for high feed machining.

Product	Grade	RE [mm]	P	vc [m/min]	f [mm/tooth]	ap [mm]	M	vc [m/min]	f [mm/tooth]	ap [mm]	K	vc [m/min]	f [mm/tooth]	ap [mm]	N	vc [m/min]	f [mm/tooth]	ap [mm]	S	vc [m/min]	f [mm/tooth]	ap [mm]	H	vc [m/min]	f [mm/tooth]	ap [mm]
BNGX 10T308SR-HM	**8215**	0.8		–	–	–		–	–	–	◩	290	0.30	0.4		–	–	–		–	–	–	■	60	0.15	1.0
	M8310	0.8		–	–	–		–	–	–	◩	305	0.30	0.4		–	–	–		–	–	–	■	65	0.15	1.0
	M8330	0.8		–	–	–		–	–	–	◩	285	0.30	0.4		–	–	–		–	–	–	◩	60	0.15	1.0

ANHX 10

PRAMET

Size	W1 [mm]	D1 [mm]	L [mm]	S [mm]
10T3	5.800	2.76	9.72	4.70



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



F geometry with positive design for finish and semi-finish machining.

Product	Grade	RE [mm]	P	vc [m/min]	f [mm/tooth]	ap [mm]	M	vc [m/min]	f [mm/tooth]	ap [mm]	K	vc [m/min]	f [mm/tooth]	ap [mm]	N	vc [m/min]	f [mm/tooth]	ap [mm]	S	vc [m/min]	f [mm/tooth]	ap [mm]	H	vc [m/min]	f [mm/tooth]	ap [mm]
ANHX 10T320SR-F	**M8310**	2.0	■	380	0.10	2.5	◩	190	0.09	2.5		–	–	–		–	–	–		–	–	–		–	–	–
	M8330	2.0	■	340	0.10	2.5	◩	200	0.09	2.5		–	–	–		–	–	–		–	–	–		–	–	–

a_e / DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
x.v	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	BNGX 10-M	BNGX 10-MM	BNGX 10-HM
RE	0.8	0.8	0.8
BS	–	–	–

	ANHX 10 - F
RE	2.0
BS	0.92

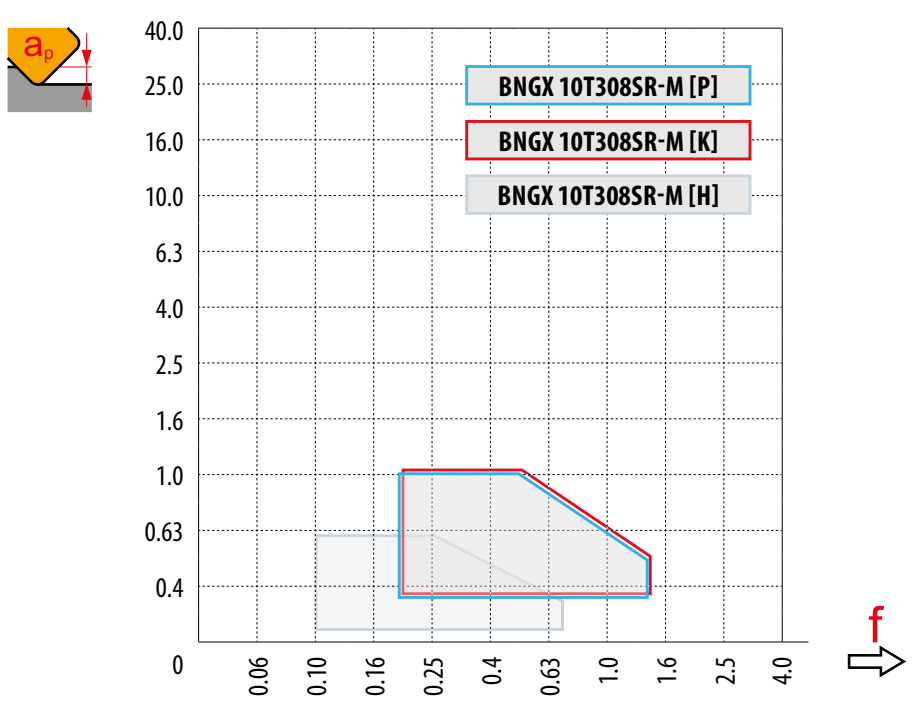

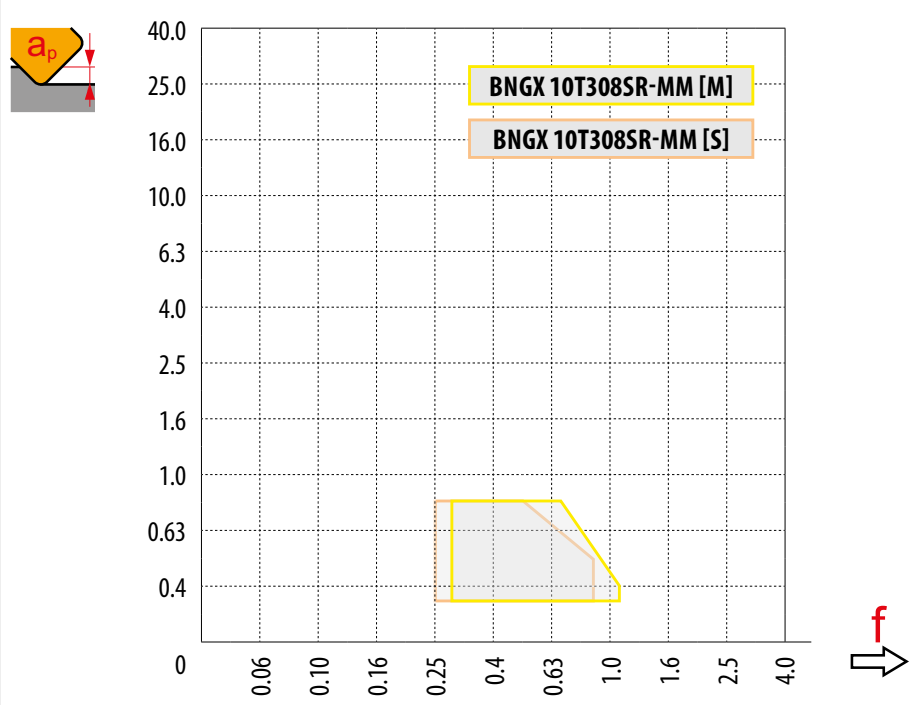

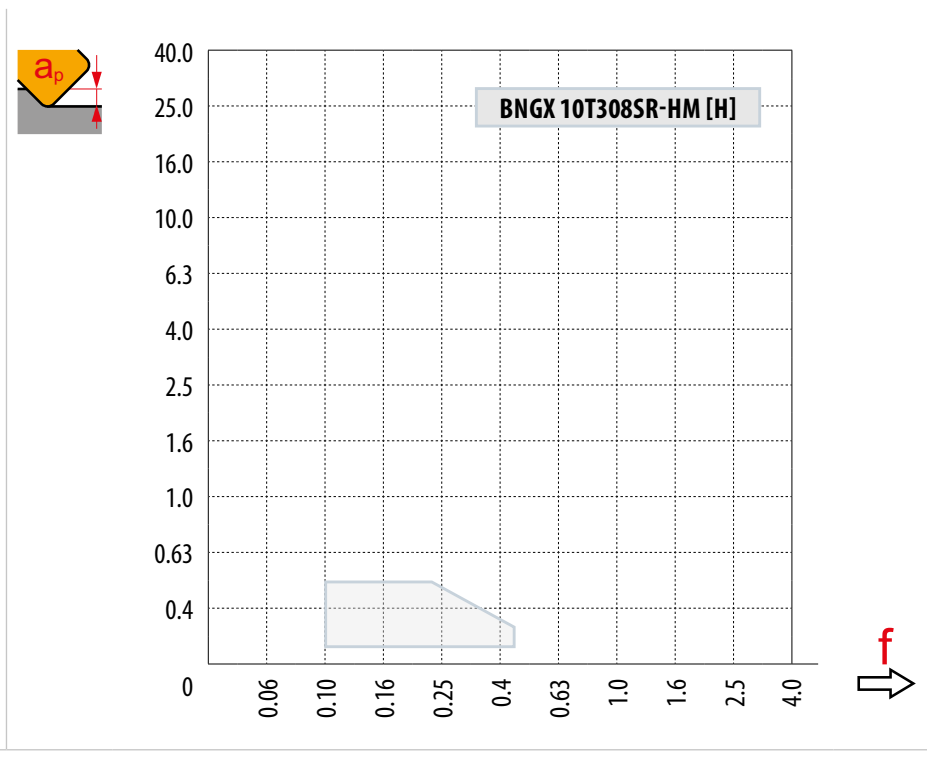

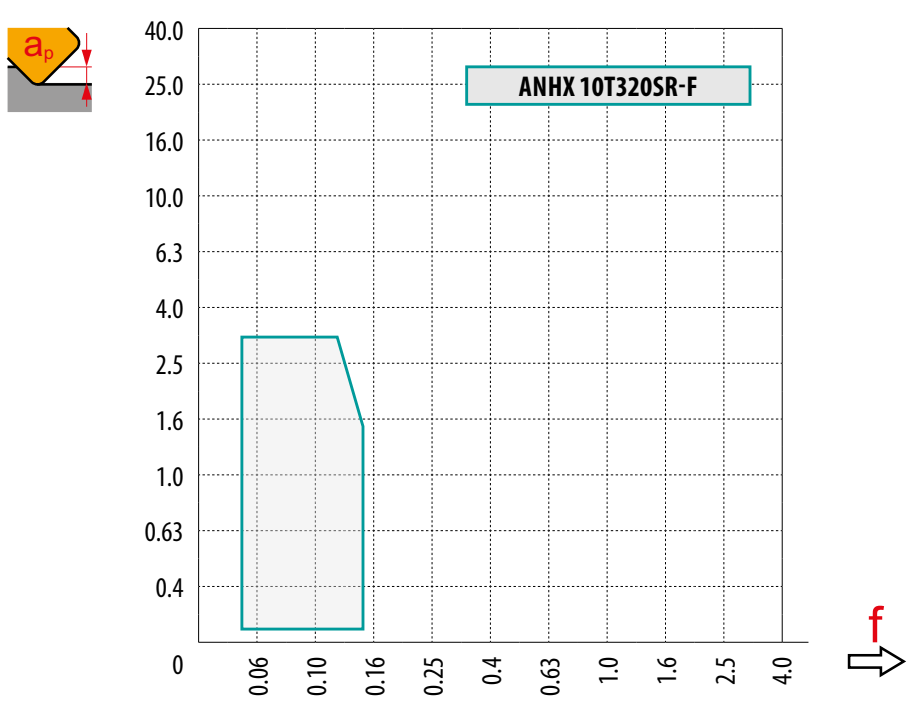

BNGX 10 (HFC)										
DCX	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
16	DEF	9.40	12.85	13.36	13.80	14.20	14.56	14.88	15.19	15.47
18		11.40	14.85	15.36	15.80	16.20	16.56	16.88	17.19	17.47
20		13.40	16.85	17.36	17.80	18.20	18.56	18.88	19.19	19.47
25		18.40	21.85	22.36	22.80	23.20	23.56	23.88	24.19	24.47
28		21.40	24.85	25.36	25.80	26.20	26.56	26.88	27.19	27.47
32		25.40	28.85	29.36	29.80	30.20	30.56	30.88	31.19	31.47
35		28.40	31.85	32.36	32.80	33.20	33.56	33.88	34.19	34.47
40		33.40	36.85	37.36	37.80	38.20	38.56	38.88	39.19	39.47
42		35.40	38.85	39.36	39.80	40.20	40.56	40.88	41.19	41.47
	a_p	**0.00**	**0.30**	**0.40**	**0.50**	**0.60**	**0.70**	**0.80**	**0.90**	**1.00**
	1 f	–	1.30	1.10	0.90	0.80	0.72	0.68	0.65	0.50

BNGX 10		
DCX	$a_{e\,max}$	f_{max}
16	3.5	0.12
18	3.5	0.12
20	4.0	0.15
25	4.0	0.15
28	4.0	0.17
32	4.0	0.17
35	4.0	0.17
40	4.0	0.17
42	4.0	0.17

BNGX 10 (HFC)			
a_p	0.3	0.6	1.0
1 f	1.10	0.60	0.30

BNGX 10 (HFC)		
DCX	RPMX	APMX/l
16	4.0	1/16
18	4.0	1/16
20	4.0	1/16
25	2.8	1/22
28	2.3	1/26
32	1.9	1/32
35	1.7	1/35
40	1.3	1/46
42	1.3	1/46

ANHX 10		
DCX	RPMX	APMX/l
16	1.6	2.65/100
18	1.3	2.15/100
20	1.1	1.80/100
25	0.8	1.25/100
28	0.7	1.10/100
32	0.5	0.75/100
35	0.5	0.75/100
40	0.4	0.55/100
42	0.4	0.55/100

BNGX 10 (HFC)		
DCX	a_p	f_{max}
16	0.4	0.15
18	0.7	0.15
20	0.7	0.15
25	0.7	0.15
28	0.7	0.2
32	0.7	0.2
35	0.7	0.2
40	0.7	0.2
42	0.7	0.2

BNGX 10 (HFC)				
DCX	DMIN	DMAX	SMAX DMIN	SMAX DMAX
16	22.4	31.8	0.5	0.5
18	25.4	35.8	0.5	0.5
20	29.4	39.8	0.5	0.5
25	39.4	49.8	0.5	0.5
28	45.4	55.8	0.5	0.5
32	53.4	63.8	0.5	0.5
35	59.4	69.8	0.5	0.5
40	69.4	79.8	0.5	0.5
42	73.4	83.8	0.5	0.5

DCX	µm	3	5	10	15	20	30	40	50	60	80	100
16	FE	0.438	0.566	0.800	0.980	1.131	1.386	1.600	1.789	1.960	2.263	2.530
18		0.465	0.600	0.849	1.039	1.200	1.470	1.697	1.897	2.078	2.400	2.683
20		0.490	0.632	0.894	1.095	1.265	1.549	1.789	2.000	2.191	2.530	2.828
25		0.548	0.707	1.000	1.225	1.414	1.732	2.000	2.236	2.449	2.828	3.162
28		0.580	0.748	1.058	1.296	1.497	1.833	2.117	2.366	2.592	2.993	3.347
32		0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578
35		0.648	0.837	1.183	1.449	1.673	2.049	2.366	2.646	2.898	3.347	3.742
40		0.693	0.894	1.265	1.549	1.789	2.191	2.530	2.828	3.098	3.578	4.000
42		0.710	0.917	1.296	1.587	1.833	2.245	2.592	2.898	3.175	3.666	4.099

ANHX 10

RE	µm	3	5	10	15	20	30	40	50	60	80	100
2.0	FE	0.219	0.283	0.400	0.490	0.566	0.693	0.800	0.894	0.980	1.131	1.265



	R	T
BNGX 10T308	1.60	0.44



	max a_e/DCX
ANHX 10T320	0.05

SSN11

P M K S

PRAMET S

KAPR	18°
APMX	1.7 mm



High Feed Milling Cutter for SN.. 11 inserts with Internal Coolant, Next Generation

High-feed milling cutter for bigger diameters utilising double-sided SNXG 11 inserts with eight cutting edges and APMX of 1.7 mm. Internal coolant. Suitable for a wide range of applications. Available in cylindrical, modular and arbor style in range of Ø32 up to Ø125 mm. Body treated for longer tool life.

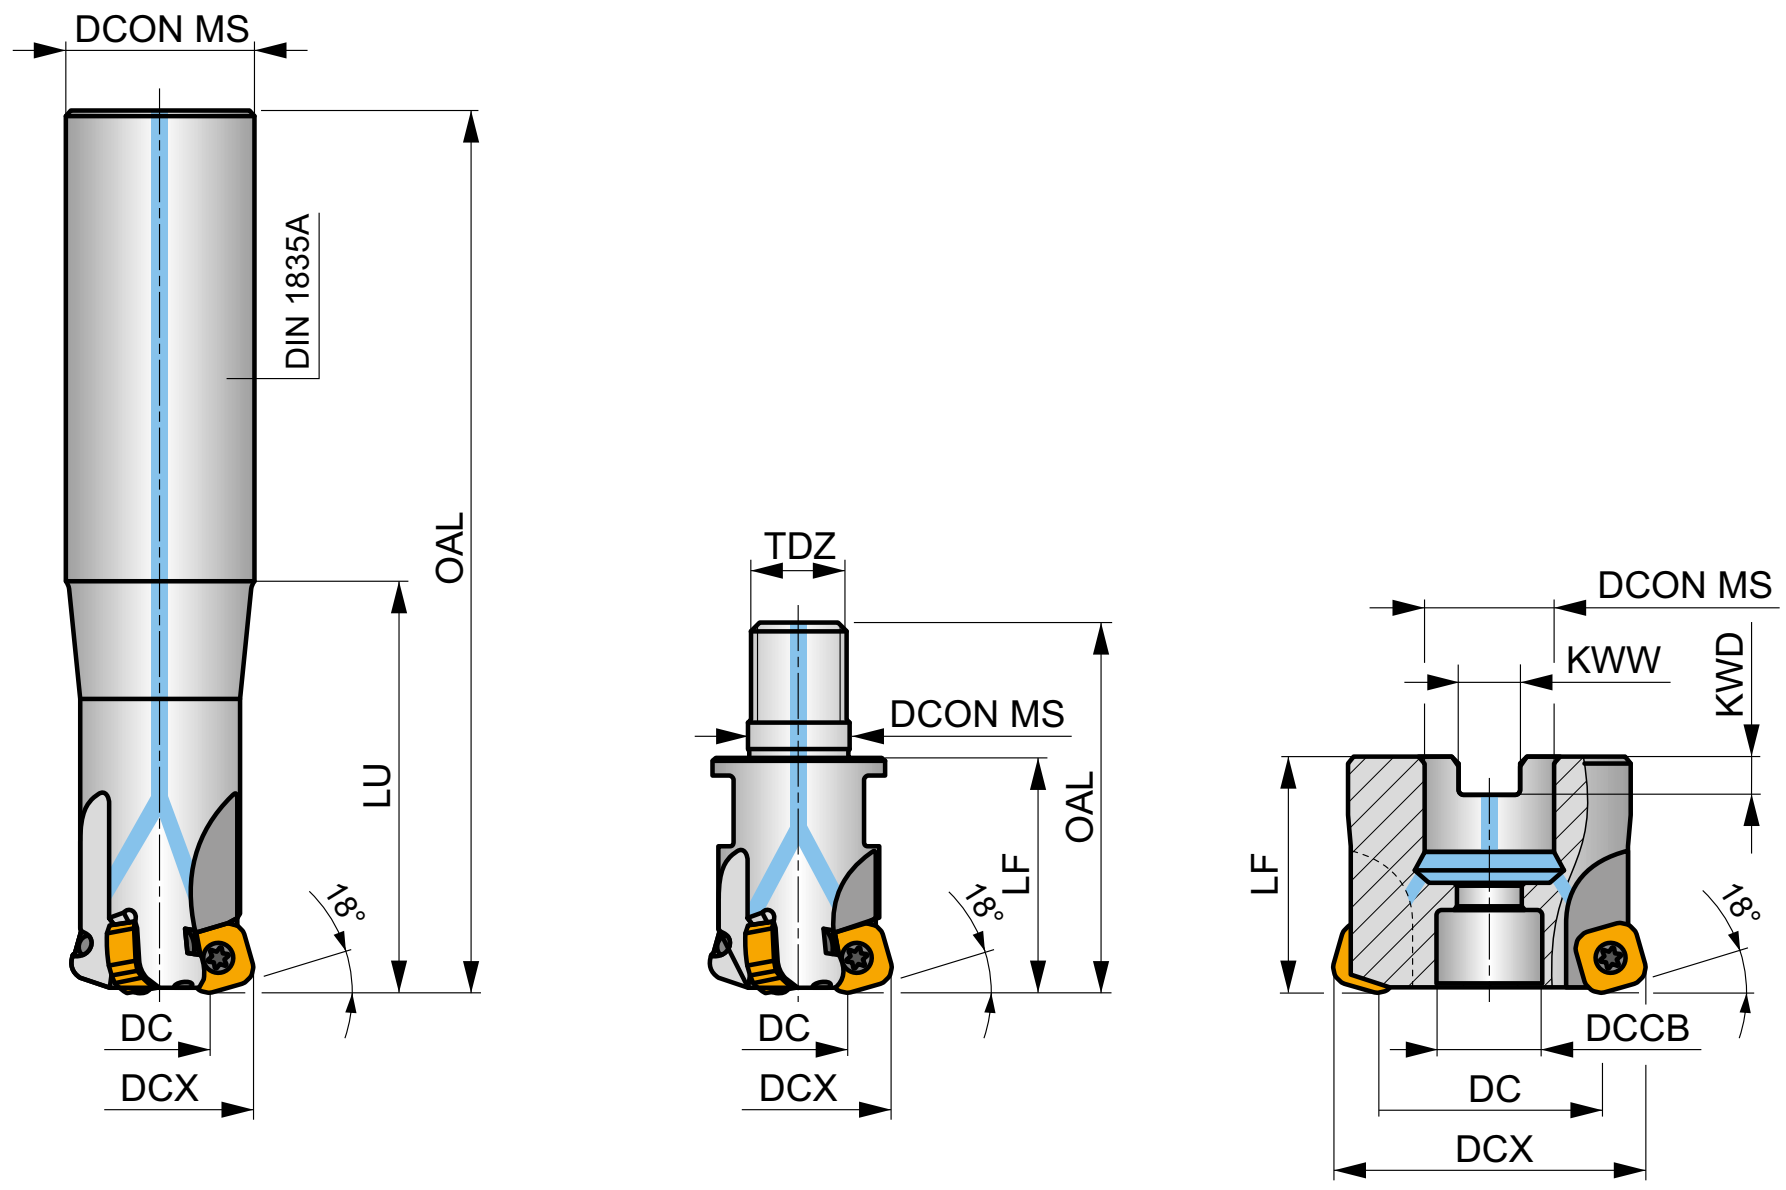

h_m 0.20 - 0.46

h_m 0.20 - 0.46

	Product	DCX [mm]	DC [mm]	OAL [mm]	DCON MS [mm]	DCCB [mm]	LU [mm]	LF [mm]	TDZ	KWW [mm]	KWD [mm]	GAMF [°]	GAMP [°]		ZNP		max.		kg			
DIN 1835A	32E3R070A32-SSN11-C	32	18.3	150	32	–	70	–	–	–	–	-11.5	-10	3	–	–	17500	✓	0.69	GI339	C0314	–
	32E3R120A32-SSN11-C	32	18.3	200	32	–	120	–	–	–	–	-11.5	-10	3	–	–	17500	✓	0.89	GI339	C0314	–
	35E3R050A32-SSN11-C	35	21.2	200	32	–	50	–	–	–	–	-11	-10	3	–	–	16800	✓	1.11	GI339	C0314	–
MODULAR	32E3R040M16-SSN11-C	32	18.3	63	17	–	–	40	M16	–	–	-11.5	-10	3	–	–	17500	✓	0.17	GI339	C0314	–
	35E3R040M16-SSN11-C	35	21.2	63	17	–	–	40	M16	–	–	-11	-10	3	–	–	16800	✓	0.19	GI339	C0314	–
	40E4R043M16-SSN11-C	40	26.2	66	17	–	–	43	M16	–	–	-10.5	-10	4	–	✓	15700	✓	0.23	GI339	C0314	–
ISO 6462 DIN 8030	40A04R-SMOSN11-C	40	26.2	–	16	12.4	–	40	–	8.4	5.6	-10.5	-10	4	–	✓	15700	✓	0.19	GI339	C0316	–
	42A04R-SMOSN11-C	42	28.2	–	16	14.1	–	40	–	8.4	5.6	-10.5	-10	4	–	✓	15300	✓	0.21	GI339	C0318	–
	50A05R-SMOSN11-C	50	36.1	–	22	18.1	–	40	–	10.4	6.3	-10	-10	5	–	✓	14000	✓	0.31	GI339	C0320	–
	50A06R-SMOSN11-C	50	36.1	–	22	18.1	–	40	–	10.4	6.3	-10	-10	6	–	✓	14000	✓	0.31	GI339	C0320	–
	52A05R-SMOSN11-C	52	38.1	–	22	18.1	–	40	–	10.4	6.3	-10	-10	5	–	✓	13800	✓	0.34	GI339	C0320	–
	52A06R-SMOSN11-C	52	38.1	–	22	18.1	–	40	–	10.4	6.3	-10	-10	6	–	✓	13800	✓	0.33	GI339	C0320	–
	63A06R-SMOSN11-C	63	49.1	–	22	18.1	–	40	–	10.4	6.3	-10	-10	6	–	✓	12500	✓	0.46	GI339	C0320	–
	63A08R-SMOSN11-C	63	49.1	–	22	18.1	–	40	–	10.4	6.3	-10	-10	8	–	✓	12500	✓	0.47	GI339	C0320	–
	66A06R-SMOSN11-C	66	52.1	–	27	18.1	–	50	–	12.4	7	-10	-10	6	–	✓	12200	✓	0.74	GI339	C0322	–
	66A08R-SMOSN11-C	66	52.1	–	27	18.1	–	50	–	12.4	7	-10	-10	8	–	✓	12200	✓	0.75	GI339	C0322	–
	80A07R-SMOSN11-C	80	66.1	–	27	38.1	–	50	–	12.4	7	-10	-10	7	–	✓	11100	✓	0.95	GI339	C0324	AC001
	80A09R-SMOSN11-C	80	66.1	–	27	38.1	–	50	–	12.4	7	-10	-10	9	–	✓	11100	✓	1.04	GI339	C0324	AC001
	100A08R-SMOSN11-C	100	86.1	–	32	45.1	–	50	–	14.4	8	-10	-10	8	–	✓	9900	✓	1.63	GI339	C0324	AC002
	115A08R-SMOSN11-C	115	101.1	–	32	45.1	–	50	–	14.4	8	-10	-10	8	–	✓	9200	✓	2.34	GI339	C0324	AC002
	125A08R-SMOSN11-C	125	111.1	–	40	56.1	–	63	–	16.4	9	-10	-10	8	–	✓	8900	✓	3.39	GI339	C0324	AC003

GI339	SNGX 1104..

C0314	US 44012-T15P	3.5	M 4	12	–	–	Flag T15P	–
C0316	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	HCS 0840C
C0318	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	HS 90835
C0320	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	HS 1030C
C0322	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	HS 1230C
C0324	US 44012-T15P	3.5	M 4	12	D-T08P/T15P	FG-15	–	–

AC001	KS 1230	K.FMH27
AC002	KS 1635	K.FMH32
AC003	KS 2040	K.FMH40

SNGX 11

PRAMET

	IC [mm]	D1 [mm]	S [mm]
1104	10.600	4.56	4.76



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product		RE [mm]	P vc [m/min]	P f [mm/tooth]	P ap [mm]	M vc [m/min]	M f [mm/tooth]	M ap [mm]	K vc [m/min]	K f [mm/tooth]	K ap [mm]	N vc [m/min]	N f [mm/tooth]	N ap [mm]	S vc [m/min]	S f [mm/tooth]	S ap [mm]	H vc [m/min]	H f [mm/tooth]	H ap [mm]
  M geometry with positive design for high feed machining.																				
SNGX 110416SR-M	**8215**	1.6	■ 260	0.60	1.0	–	–	–	■ 245	0.60	1.0	–	–	–	–	–	–	–	–	–
	M8310	1.6	■ 275	0.60	1.0	–	–	–	■ 260	0.60	1.0	–	–	–	–	–	–	–	–	–
	M8330	1.6	■ 260	0.60	1.0	–	–	–	■ 245	0.60	1.0	–	–	–	–	–	–	–	–	–
	M8340	1.6	■ 245	0.60	1.0	–	–	–	◩ 230	0.60	1.0	–	–	–	–	–	–	–	–	–
	M9325	1.6	■ 305	0.60	1.0	–	–	–	■ 285	0.60	1.0	–	–	–	–	–	–	–	–	–
	M9340	1.6	■ 270	0.60	1.0	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
  HFC MM geometry with highly positive design for high feed machining.																				
SNGX 110416SR-MM	**M6330**	1.6	■ 175	0.60	1.0	■ 125	0.54	1.0	–	–	–	–	–	–	■ 50	0.42	0.8	–	–	–
	M8340	1.6	■ 190	0.60	1.0	■ 110	0.54	1.0	–	–	–	–	–	–	■ 45	0.42	0.8	–	–	–
	M8345	1.6	■ 150	0.60	1.0	■ 90	0.54	1.0	–	–	–	–	–	–	■ 35	0.42	0.8	–	–	–
	M9340	1.6	■ 210	0.60	1.0	■ 125	0.54	1.0	–	–	–	–	–	–	■ 50	0.42	0.8	–	–	–

a_e / DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
X.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	SNGX 11 - M	SNGX 11 - MM
RE	1.6	1.6
BS	–	–

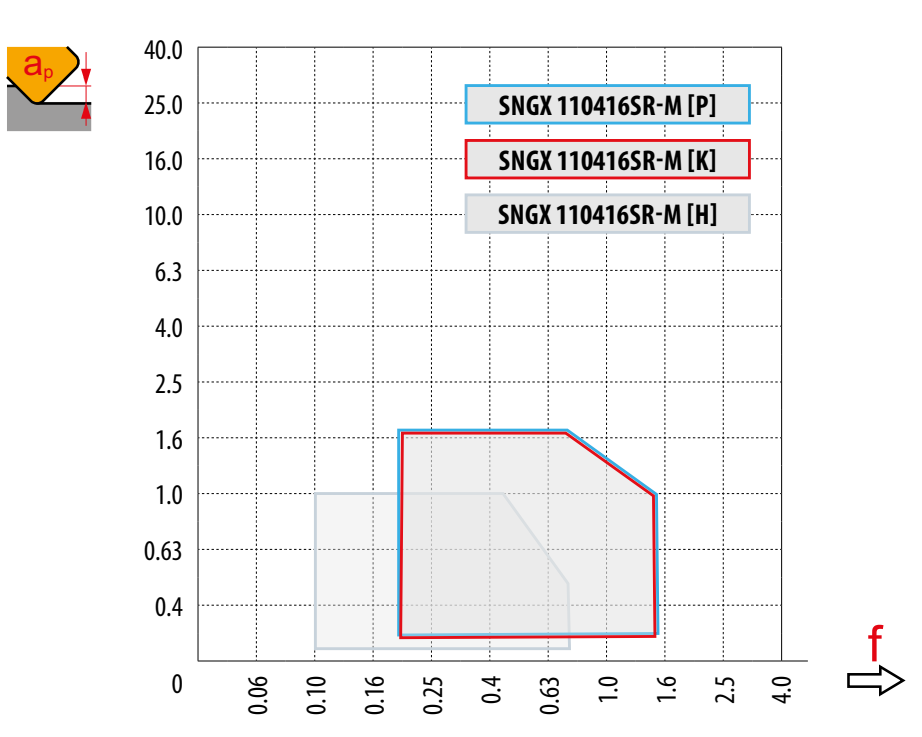

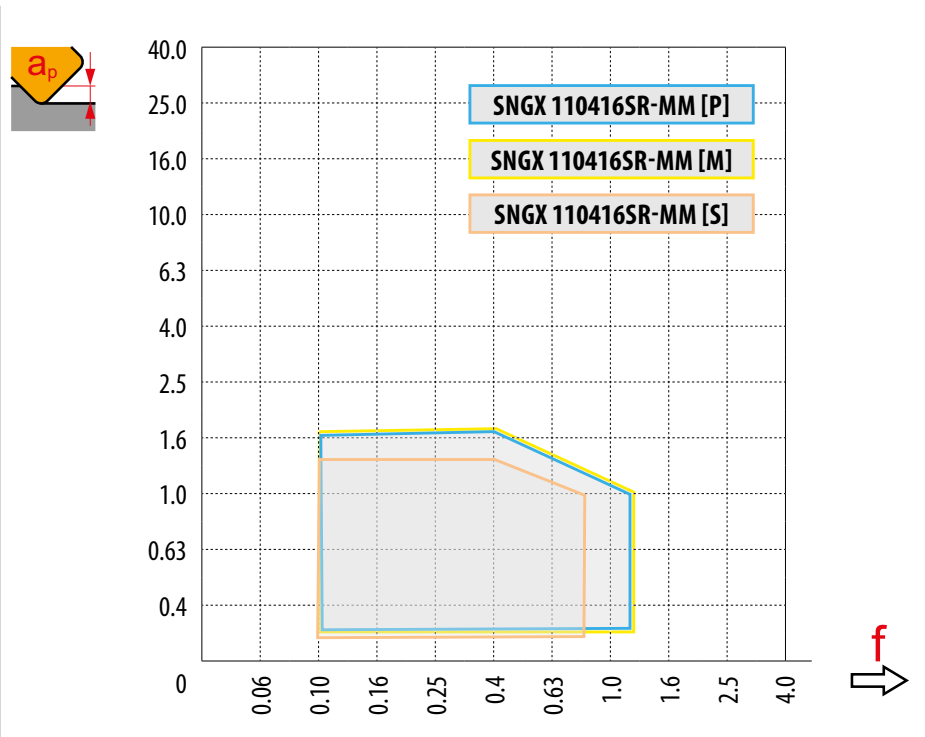

HFC

DCX	a_p	0.00	0.20	0.40	0.60	0.80	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70
32	DEF	18.30	19.53	20.76	21.99	23.22	24.46	25.07	25.69	26.30	26.92	27.53	28.15	28.76
35		21.20	22.43	23.66	24.89	26.12	27.36	27.97	28.59	29.20	29.82	30.43	31.05	31.66
40		26.20	27.43	28.66	29.89	31.12	32.36	32.97	33.59	34.20	34.82	35.43	36.05	36.66
42		28.20	29.43	30.66	31.89	33.12	34.36	34.97	35.59	36.20	36.82	37.43	38.05	38.66
50		36.10	37.33	38.56	39.79	41.02	42.26	42.87	43.49	44.10	44.72	45.33	45.95	46.56
52		38.10	39.33	40.56	41.79	43.02	44.26	44.87	45.49	46.10	46.72	47.33	47.95	48.56
63		49.10	50.33	51.56	52.79	54.02	55.26	55.87	56.49	57.10	57.72	58.33	58.95	59.56
66		52.10	53.33	54.56	55.79	57.02	58.26	58.87	59.49	60.10	60.72	61.33	61.95	62.56
80		66.10	67.33	68.56	69.79	71.02	72.26	72.87	73.49	74.10	74.72	75.33	75.95	76.56
100		86.10	87.33	88.56	89.79	91.02	92.26	92.87	93.49	94.10	94.72	95.33	95.95	96.56
115		101.10	102.33	103.56	104.79	106.02	107.26	107.87	108.49	109.10	109.72	110.33	110.95	111.56
125		111.10	112.33	113.56	114.79	116.02	117.26	117.87	118.49	119.10	119.72	120.33	120.95	121.56
	a_p	–	0.20	0.40	0.60	0.80	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70
	1 f	–	1.37	0.98	0.81	0.71	0.64	0.62	0.59	0.58	0.56	0.54	0.53	0.52

DCX	a_{emax}	f_{max}
SNGX		
32	5.0	0.25
35	5.0	0.25
40	5.2	0.30
42	5.2	0.30
50	5.3	0.30
52	5.3	0.30
63	5.4	0.30
66	5.4	0.30
80	5.5	0.35
100	5.5	0.35
115	5.5	0.35
125	5.5	0.35

DCX	RPMX	APMX/l
SNGX (HFC)		
32	0.8	1.4/100
35	0.8	1.4/100
40	0.7	1.2/100
42	0.7	1.2/100
50	0.5	0.9/100
52	0.5	0.9/100
63	0.4	0.7/100
66	0.4	0.7/100
80	0.3	0.5/100
100	0.2	0.3/100
115	0.2	0.3/100
125	0.2	0.3/100

DCX	a_p	f_{max}
SNGX (HFC)		
32	0.2	0.3
35	0.2	0.3
40	0.2	0.3
42	0.2	0.3
50	0.3	0.4
52	0.3	0.4
63	0.3	0.4
66	0.3	0.4
80	0.3	0.4
100	0.3	0.4
115	0.3	0.4
125	0.3	0.4

DCX	µm	**3**	**5**	**10**	**15**	**20**	**30**	**40**	**50**	**60**	**80**	**100**
32		0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578
35		0.648	0.837	1.183	1.449	1.673	2.049	2.366	2.646	2.898	3.347	3.742
40		0.693	0.894	1.265	1.549	1.789	2.191	2.530	2.828	3.098	3.578	4.000
42		0.710	0.917	1.296	1.587	1.833	2.245	2.592	2.898	3.175	3.666	4.099
50		0.775	1.000	1.414	1.732	2.000	2.449	2.828	3.162	3.464	4.000	4.472
52	FE	0.790	1.020	1.442	1.766	2.040	2.498	2.884	3.225	3.533	4.079	4.561
63		0.869	1.122	1.587	1.944	2.245	2.750	3.175	3.550	3.888	4.490	5.020
66		0.890	1.149	1.625	1.990	2.298	2.814	3.250	3.633	3.980	4.596	5.138
80		0.980	1.265	1.789	2.191	2.530	3.098	3.578	4.000	4.382	5.060	5.657
100		1.095	1.414	2.000	2.449	2.828	3.464	4.000	4.472	4.899	5.657	6.325
115		1.175	1.517	2.145	2.627	3.033	3.715	4.290	4.796	5.254	6.066	6.782
125		1.225	1.581	2.236	2.739	3.162	3.873	4.472	5.000	5.477	6.325	7.071

SNGX

a_p	**0.2**	**0.5**	**1.0**	**1.7**
1 f	1.20	1.00	0.50	0.25

DCX	DMIN	DMAX	SMAX DMIN	SMAX DMAX
	SNGX (HFC)			
32	48.0	63.8	0.7	1.4
35	54.0	69.8	0.8	1.5
40	64.0	79.8	0.9	1.5
42	68.0	83.8	1.0	1.6
50	84.0	99.8	0.9	1.4
52	88.0	103.8	1.0	1.4
63	109.0	125.8	1.0	1.4
66	115.0	131.8	1.1	1.4
80	143.0	159.8	1.0	1.3
100	183.0	199.8	0.9	1.1
115	213.0	229.8	1.1	1.3
125	233.0	249.8	1.2	1.4



SNGX	R	T
SNGX 110416	4.6	0.92

SPD09

P M K S H

PRAMET

S

KAPR	19°
APMX	2.0 mm



PENTA HF High-Feed Milling Cutter with Internal Coolant

Productive high-feed milling cutter utilising single-sided positive PD.. 09 insert with 5 cutting edges and APMX of 2 mm. Internal coolant. Suitable for a wide range of applications. Available in cylindrical and arbor style, in range of Ø32 up to Ø140 mm. Body treated for longer tool life.

PENTA HF

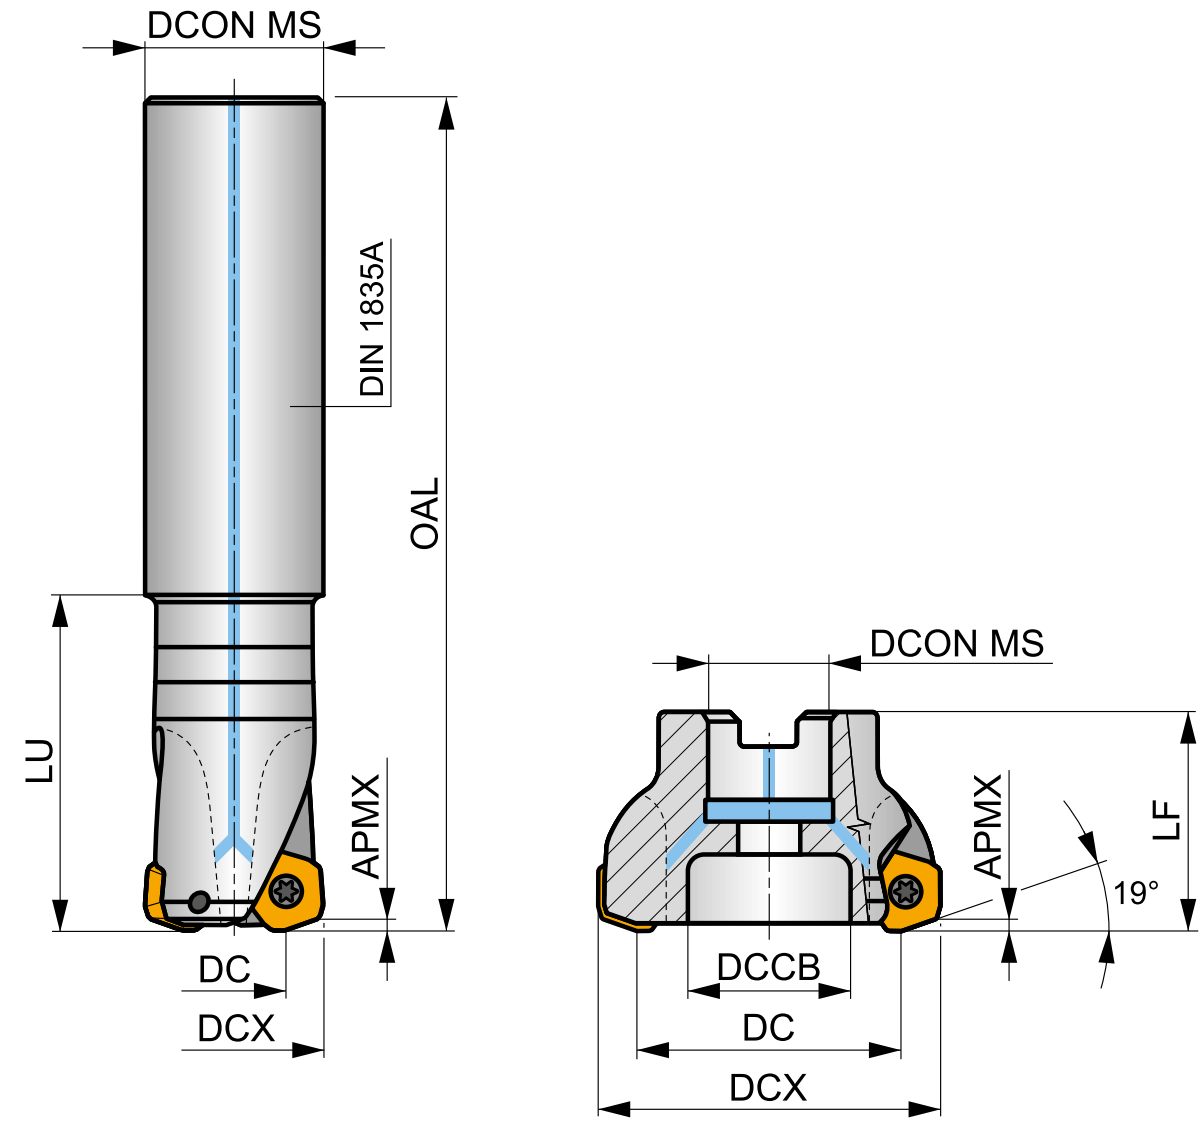

h_m	0.065 - 0.975
h_m	0.065 - 0.975

	Product	DCX [mm]	DC [mm]	OAL [mm]	DCON MS [mm]	DCCB [mm]	LU [mm]	LF [mm]	GAMF [°]	GAMP [°]			max.		kg			
DIN 1835A	32E2R060A32-SPD09-C	32	18.4	250	32	–	60	–	-24	10	2	–	13100	✓	1.54	GI245	C0340	–
	40E3R060A32-SPD09-C	40	25.5	250	32	–	60	–	-11	10	3	–	11700	✓	1.43	GI245	C0340	–
ISO 6462 DIN 8030	42A03R-S19PD09-C	42	27.5	–	16	12	–	40	-8	10	3	–	11500	✓	0.18	GI245	C0342	–
	50A04R-S19PD09-C	50	35.3	–	22	18	–	40	-3	10	4	–	10500	✓	0.23	GI245	C0343	–
	50A05R-S19PD09-C	50	35.3	–	22	18	–	40	-3	10	5	–	10500	✓	0.36	GI245	C0343	–
	52A04R-S19PD09-C	52	37.3	–	22	18	–	40	-3	10	4	–	10300	✓	0.25	GI245	C0343	–
	63A05R-S19PD09-C	63	48.2	–	22	18	–	40	-1	10	5	–	9400	✓	0.33	GI245	C0343	–
	63A06R-S19PD09-C	63	48.2	–	22	18	–	40	-1	10	6	–	9300	✓	0.46	GI245	C0343	–
	66A06R-S19PD09-C	66	51.2	–	22	18	–	40	-1	10	6	–	9200	✓	0.35	GI245	C0343	–
	66A06R-S19PD09-CF	66	51.2	–	27	22	–	50	-1	10	6	–	9100	✓	0.68	GI245	C0344	–
	80A05R-S19PD09-C	80	65.3	–	27	37	–	50	-1	10	5	–	8300	✓	0.84	GI245	C0341	AC001
	80A06R-S19PD09-C	80	65.3	–	27	37	–	50	-1	10	6	–	8300	✓	0.88	GI245	C0341	AC001
	100A06R-S19PD09-C	100	58.3	–	32	45	–	50	-1	10	6	–	7400	✓	1.46	GI245	C0341	AC002
	100A08R-S19PD09-C	100	85.3	–	32	45	–	50	-1	10	8	–	7400	✓	1.40	GI245	C0341	AC002
	125A08R-S19PD09-C	125	110.3	–	40	36	–	63	-1	10	8	–	6600	✓	3.16	GI245	C0349	–
	125A10R-S19PD09-C	125	110.3	–	40	36	–	63	-1	10	10	–	6600	✓	3.15	GI245	C0349	–
	140A08R-S19PD09-C	140	125.3	–	40	36	–	63	-1	10	8	–	6200	✓	3.62	GI245	C0349	–

GI245	PD.X 0905ZE..	PDKT 0905..	PDMW 0905..

		Nm					
C0340	US 45011-T20P	5.0	M 5	11	–	–	Flag T20P
C0341	US 45011-T20P	5.0	M 5	11	SDR T20P-T	–	–

		Nm					
C0342	US 45011-T20P	5.0	M 5	11	SDR T20P-T	HS 90835	–
C0343	US 45011-T20P	5.0	M 5	11	SDR T20P-T	HS 1030C	–
C0344	US 45011-T20P	5.0	M 5	11	SDR T20P-T	HS 1230C	–
C0349	US 45011-T20P	5.0	M 5	11	SDR T20P-T	HSD 2040	–

AC001	KS 1230	K.FMH27
AC002	KS 1635	K.FMH32

PDKX 09

PRAMET

	BS [mm]	IC [mm]	D1 [mm]	L [mm]	S [mm]
0905	2.00	13.500	5.50	9.00	5.47

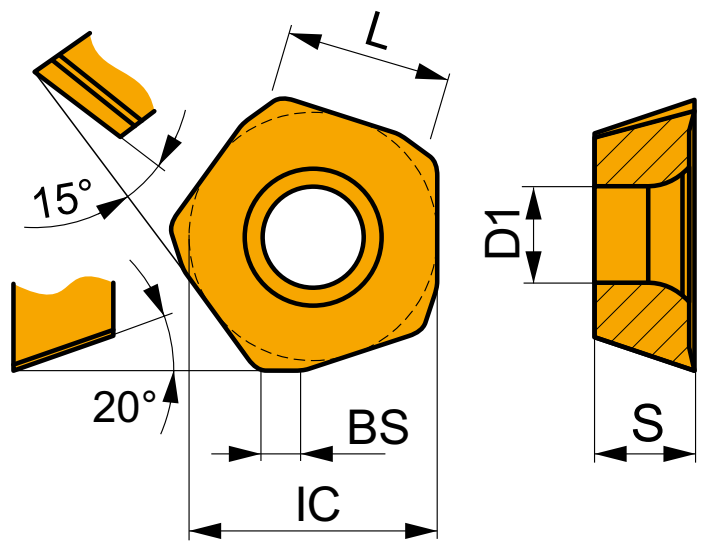

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product		RE [mm]	P vc [m/min]	P f [mm/tooth]	P ap [mm]	M vc [m/min]	M f [mm/tooth]	M ap [mm]	K vc [m/min]	K f [mm/tooth]	K ap [mm]	N vc [m/min]	N f [mm/tooth]	N ap [mm]	S vc [m/min]	S f [mm/tooth]	S ap [mm]	H vc [m/min]	H f [mm/tooth]	H ap [mm]
PDKX 0905ZEER-FM	M6330	–	■ 195	1.00	1.2	■ 135	0.90	1.2	–	–	–	–	–	–	■ 55	0.70	1.0	–	–	–
	M8345	–	■ 165	1.00	1.2	■ 95	0.90	1.2	–	–	–	–	–	–	■ 40	0.70	1.0	–	–	–
	M9340	–	■ 215	1.00	1.2	■ 125	0.90	1.2	–	–	–	–	–	–	■ 50	0.70	1.0	–	–	–



HFC S

FM geometry with highly positive design for medium high feed machining.

PDMX 09

PRAMET

	BS [mm]	IC [mm]	D1 [mm]	L [mm]	S [mm]
0905	2.00	13.500	5.50	9.00	5.47

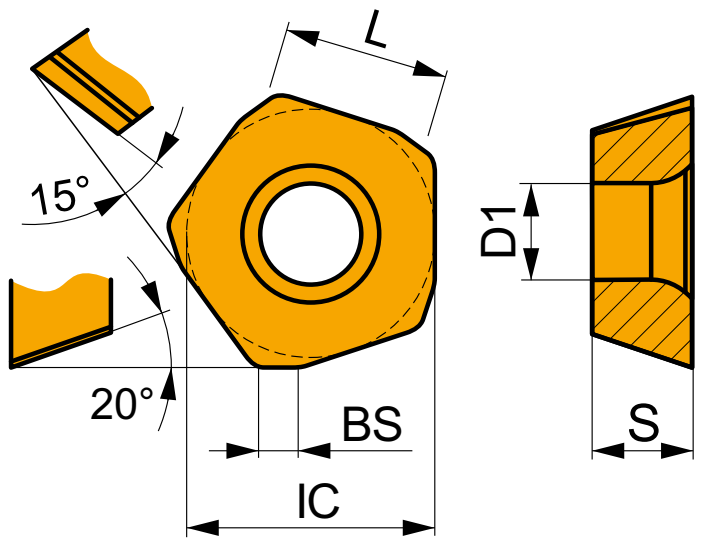

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



M geometry with positive design for medium high feed machining.



R geometry with strong design for high feed machining.

Product	Grade	RE [mm]	P vc [m/min]	P f [mm/tooth]	P ap [mm]	M vc [m/min]	M f [mm/tooth]	M ap [mm]	K vc [m/min]	K f [mm/tooth]	K ap [mm]	N vc [m/min]	N f [mm/tooth]	N ap [mm]	S vc [m/min]	S f [mm/tooth]	S ap [mm]	H vc [m/min]	H f [mm/tooth]	H ap [mm]
PDMX 0905ZEER-M	**8215**	–	■ 215	1.00	1.2	◩ 125	0.90	1.2	◩ 200	1.00	1.2	–	–	–	–	–	–	–	–	–
	M8330	–	■ 220	1.00	1.2	■ 130	0.90	1.2	◩ 205	1.00	1.2	–	–	–	–	–	–	–	–	–
	M8345	–	■ 165	1.00	1.2	■ 95	0.90	1.2	–	–	–	–	–	–	–	–	–	–	–	–
	M9340	–	■ 215	1.00	1.2	■ 125	0.90	1.2	–	–	–	–	–	–	–	–	–	–	–	–
PDMX 0905ZESR-R	**8215**	–	◩ 215	1.00	1.3	–	–	–	■ 200	1.00	1.3	–	–	–	–	–	–	■ 40	0.15	1.0
	M8330	–	◩ 215	1.00	1.3	–	–	–	■ 200	1.00	1.3	–	–	–	–	–	–	◩ 40	0.15	1.0
	M8345	–	◩ 165	1.00	1.3	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	M9325	–	◩ 245	1.00	1.3	–	–	–	■ 230	1.00	1.3	–	–	–	–	–	–	◩ 45	0.15	1.0

PDKT 09

PRAMET

	IC [mm]	D1 [mm]	L [mm]	S [mm]
0905	13.500	5.50	9.00	5.47

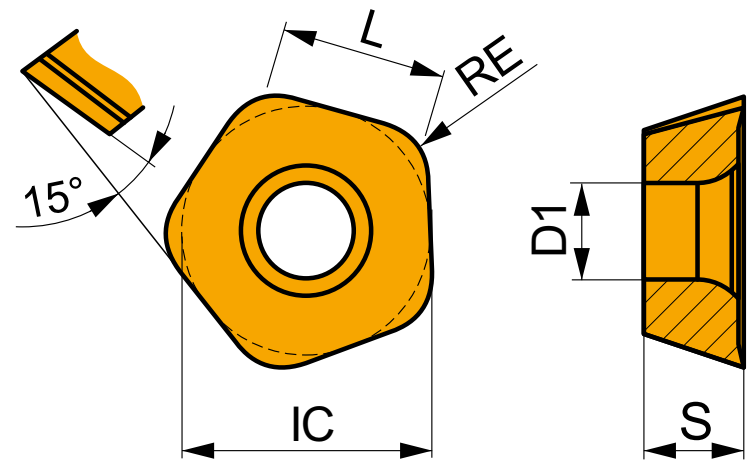

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



U HFC S

FM geometry with highly positive design for light to medium high feed machining.

Product	Grade	RE [mm]	P vc [m/min]	P f [mm/tooth]	P ap [mm]	M vc [m/min]	M f [mm/tooth]	M ap [mm]	K vc [m/min]	K f [mm/tooth]	K ap [mm]	N vc [m/min]	N f [mm/tooth]	N ap [mm]	S vc [m/min]	S f [mm/tooth]	S ap [mm]	H vc [m/min]	H f [mm/tooth]	H ap [mm]
PDKT 090530ER-FM	**8215**	3.0	■ 240	1.00	1.2	◩ 140	0.90	1.2	◩ 225	1.00	1.2	–	–	–	◩ 60	0.70	1.0	–	–	–
	M6330	3.0	■ 210	1.00	1.2	■ 150	0.90	1.2	–	–	–	–	–	–	■ 60	0.70	1.0	–	–	–
	M8310	3.0	■ 250	1.00	1.2	◩ 125	0.90	1.2	◩ 235	1.00	1.2	–	–	–	–	–	–	–	–	–
	M8330	3.0	■ 245	1.00	1.2	■ 145	0.90	1.2	◩ 230	1.00	1.2	–	–	–	◩ 60	0.70	1.0	–	–	–
	M8345	3.0	■ 180	1.00	1.2	■ 105	0.90	1.2	–	–	–	–	–	–	■ 45	0.70	1.0	–	–	–
	M9325	3.0	■ 275	1.00	1.2	–	–	–	◩ 260	1.00	1.2	–	–	–	–	–	–	–	–	–

PDMW 09

PRAMET

	IC [mm]	D1 [mm]	L [mm]	S [mm]
0905	13.500	5.50	9.00	5.47

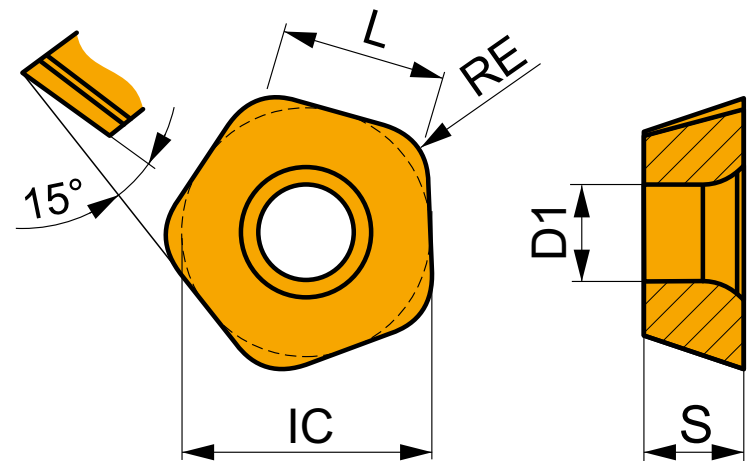

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



HFC S

Zero rake angle design for high feed machining.

Product	Grade	RE [mm]	P vc [m/min]	P f [mm/tooth]	P ap [mm]	M vc [m/min]	M f [mm/tooth]	M ap [mm]	K vc [m/min]	K f [mm/tooth]	K ap [mm]	N vc [m/min]	N f [mm/tooth]	N ap [mm]	S vc [m/min]	S f [mm/tooth]	S ap [mm]	H vc [m/min]	H f [mm/tooth]	H ap [mm]
PDMW 090530SR	**M8310**	3.0	◩ 245	1.00	1.4	–	–	–	■ 230	1.00	1.4	–	–	–	–	–	–	■ 45	0.15	1.0
	M8345	3.0	◩ 180	1.00	1.4	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	M9325	3.0	◩ 270	1.00	1.4	–	–	–	■ 255	1.00	1.4	–	–	–	–	–	–	◩ 50	0.15	1.0

a_e / DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
X.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	PDKX 09-FM	PDMX 09-M	PDMX 09-R	PDKT 09-FM	PDMW 09
RE	–	–	–	3.0	3.0
BS	2.00	2.00	2.00	–	–

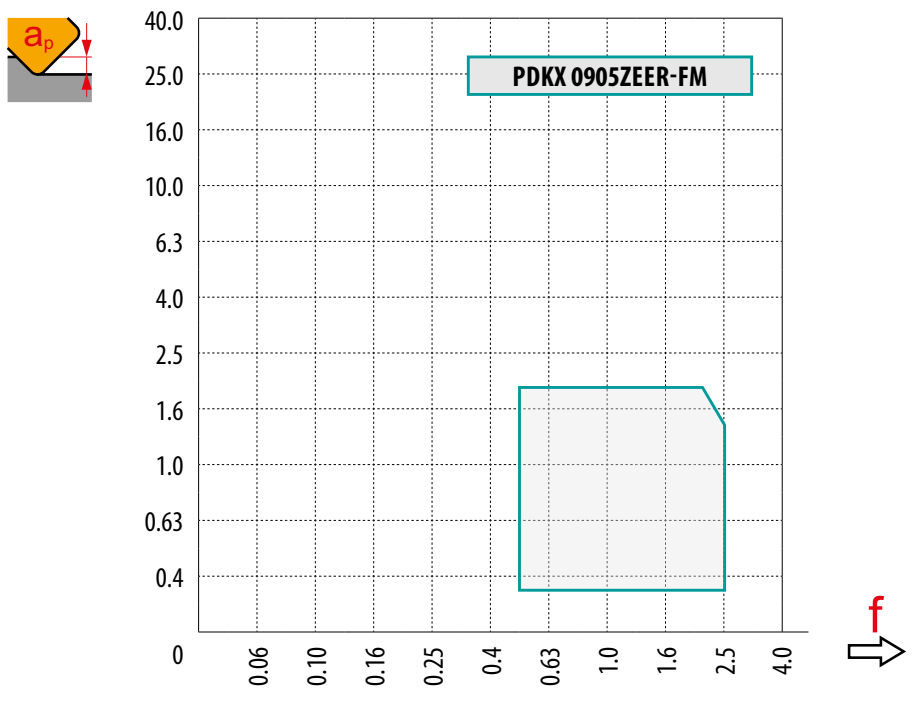

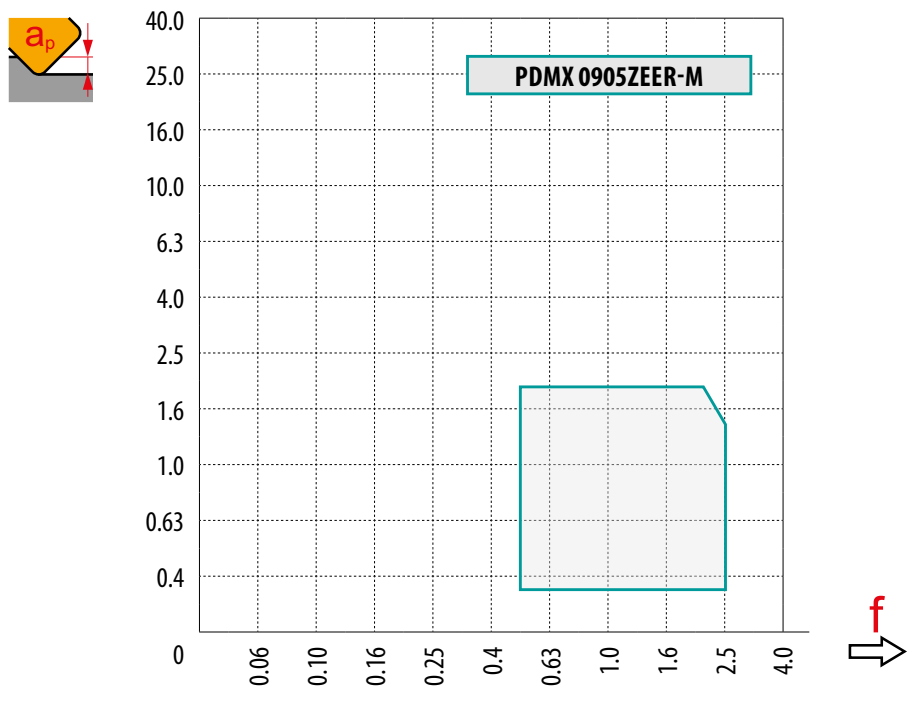

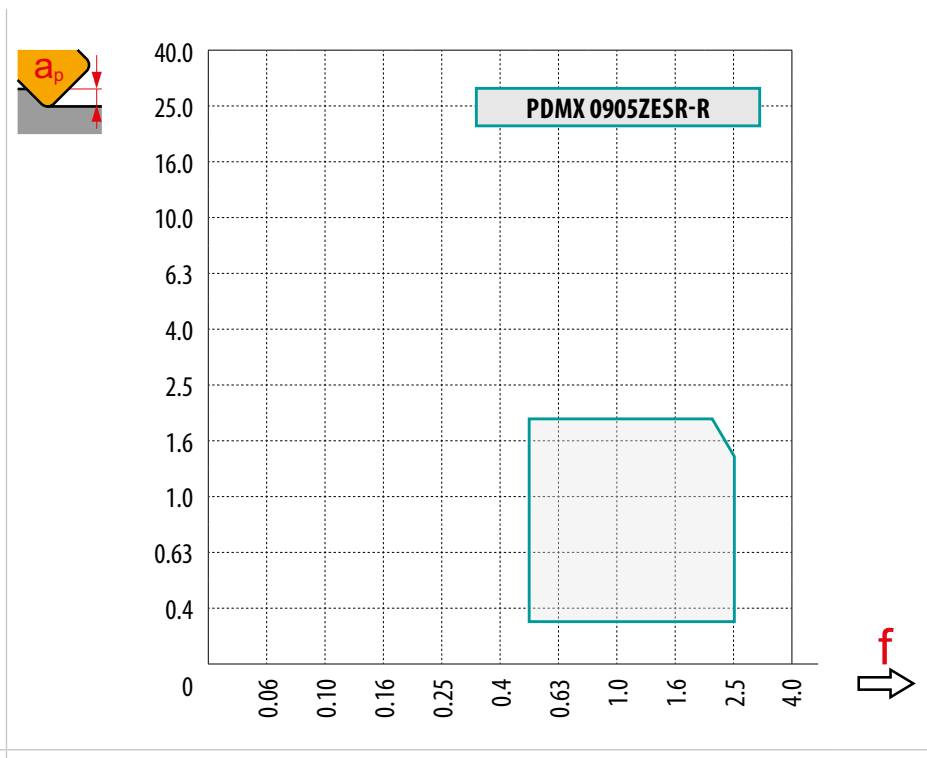

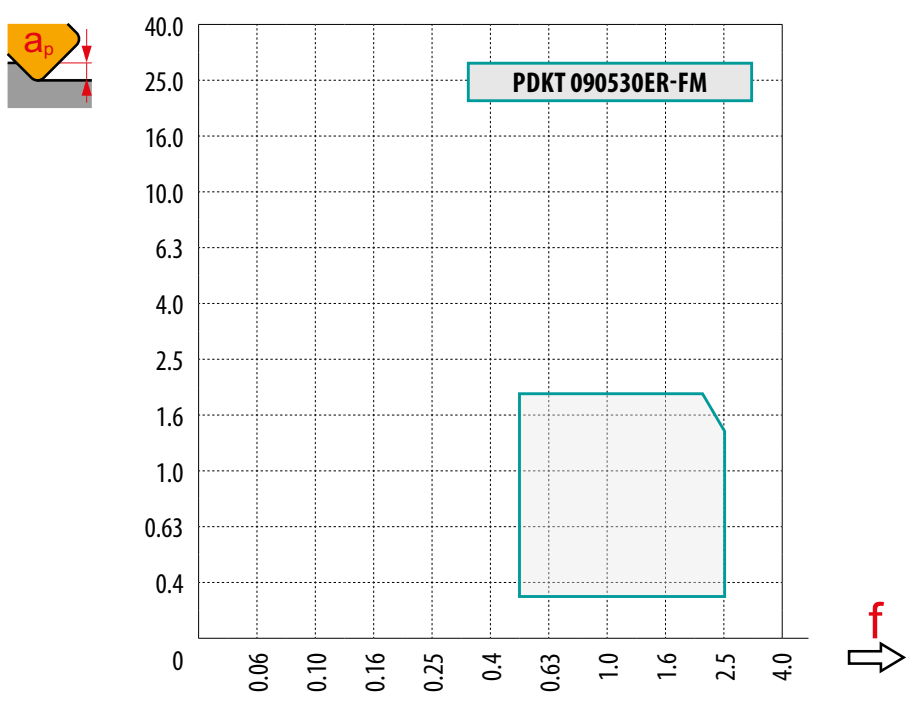

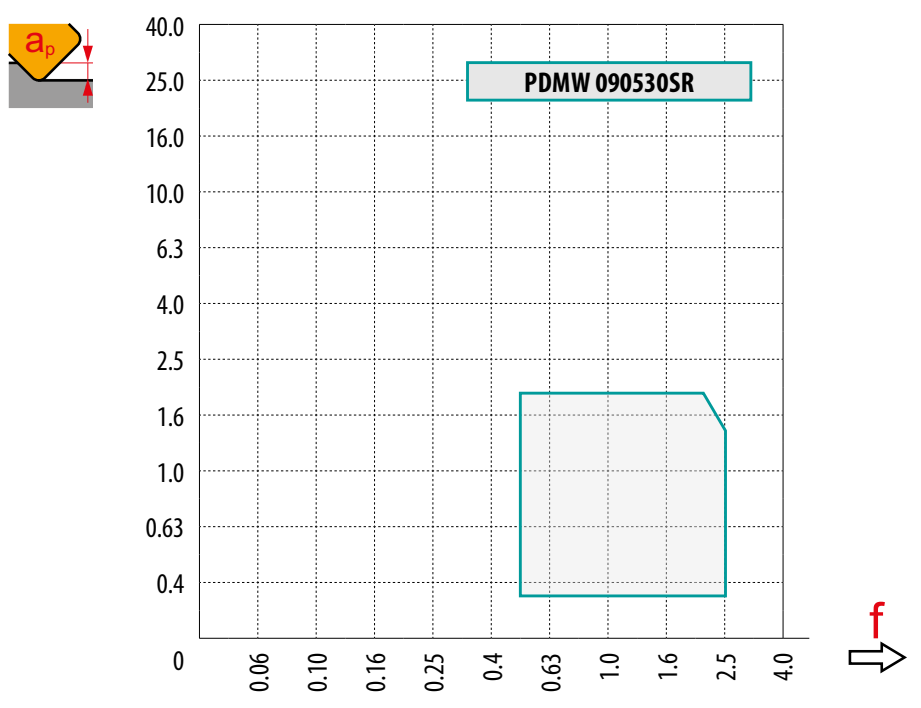

DCX	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	1.25	1.50	2.00
32	DEF	18.4	20.1	20.7	21.3	21.9	22.5	23.0	23.6	24.2	25.7	27.1	30.0
40		25.5	27.2	27.8	28.4	29.0	29.6	30.1	30.7	31.3	32.8	34.2	37.1
42		27.5	29.2	29.8	30.4	31.0	31.6	32.1	32.7	33.3	34.8	36.2	39.1
50		35.3	37.0	37.6	38.2	38.8	39.4	39.9	40.5	41.1	42.6	44.0	46.9
52		37.3	39.0	39.6	40.2	40.8	41.4	41.9	42.5	43.1	44.6	46.0	48.9
63		48.2	49.9	50.5	51.1	51.7	52.3	52.8	53.4	54.0	55.5	56.9	59.8
66		51.2	52.9	53.5	54.1	54.7	55.3	55.8	56.4	57.0	58.5	59.9	62.8
80		65.3	67.0	67.6	68.2	68.8	69.4	69.9	70.5	71.1	72.6	74.0	76.9
100		85.3	87.0	87.6	88.2	88.8	89.4	89.9	90.5	91.1	92.6	94.0	96.9
125		110.3	112.3	112.9	113.5	114.1	114.6	115.2	115.8	116.4	117.9	119.3	122.2
140		125.3	127.3	127.9	128.5	129.1	129.7	130.2	130.8	131.4	132.9	134.3	137.2

	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	1.25	1.50	2.00
	1 f	–	3.00	3.00	2.90	2.80	2.70	2.60	2.50	2.40	2.25	1.50	1.50

Follow instructions provided for flat surface milling. When milling close to vertical surfaces. decrease feed per tooth (f_z) by 50 % to prevent vibrations and damage of the cutting edge.

DCX	max	f_{max}
32	5.0	0.20
40	5.0	0.20
42	5.0	0.20
50	6.0	0.20
52	6.0	0.20
63	7.0	0.25
66	7.0	0.25
80	8.0	0.30
100	8.0	0.30

	HFC		
a_p	**0.5**	**1.0**	**2.0**
1 f	3.0	2.3	1.5

DCX	RPMX	APMX/l
40	8.0	1.80/16
42	8.0	2.00/16
50	8.0	2.00/16
52	8.0	2.00/16
63	7.0	2.00/18
66	6.0	2.00/21
80	5.0	2.00/24
100	3.0	2.00/40

DCX	**DMIN**	**DMAX**	SMAX DMIN	SMAX DMAX
40	63.7	80.0	2.00	2.00
42	67.5	84.0	2.00	2.00
50	83.3	100.0	2.00	2.00
52	87.3	104.0	2.00	2.00
63	109.2	126.0	2.00	2.00
66	115.2	132.0	2.00	2.00
80	143.3	160.0	2.00	2.00
100	183.3	200.0	2.00	2.00

DCX	a_p	f_{max}
32	1.8	0.20
40	1.8	0.20
42	2.0	0.20
50	2.0	0.20
52	2.0	0.20
63	2.0	0.25
66	2.0	0.25
80	2.0	0.30
100	2.0	0.30

DCX	µm	**3**	**5**	**10**	**15**	**20**	**30**	**40**	**50**	**60**	**80**	**100**
32		0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578
40		0.693	0.894	1.265	1.549	1.789	2.191	2.530	2.828	3.098	3.578	4.000
42		0.710	0.917	1.296	1.587	1.833	2.245	2.592	2.898	3.175	3.666	4.099
50	FE	0.775	1.000	1.414	1.732	2.000	2.449	2.828	3.162	3.464	4.000	4.472
52		0.790	1.020	1.442	1.766	2.040	2.498	2.884	3.225	3.533	4.079	4.561
63		0.869	1.122	1.587	1.944	2.245	2.750	3.175	3.550	3.888	4.490	5.020
66		0.890	1.149	1.625	1.990	2.298	2.814	3.250	3.633	3.980	4.596	5.138
80		0.980	1.265	1.789	2.191	2.530	3.098	3.578	4.000	4.382	5.060	5.657

i



DCX	**R**	**T**	**T_1**
32	4.5	1.1	6.8
40 – 140	4.5	1.1	7.3

P K H

PRAMET

S

FEED ZD07 High-Feed Milling Cutter with Internal Coolant

Productive high-feed milling cutter utilising single-sided ZD.. 07 insert with 4 cutting edges and a APMX of 1 mm. Internal coolant. Suitable for a wide range of applications. Available in cylindrical and modular style, in range of Ø16 up to Ø32 mm. Body treated for longer tool life.

FEED ZD

APMX	1.0 mm



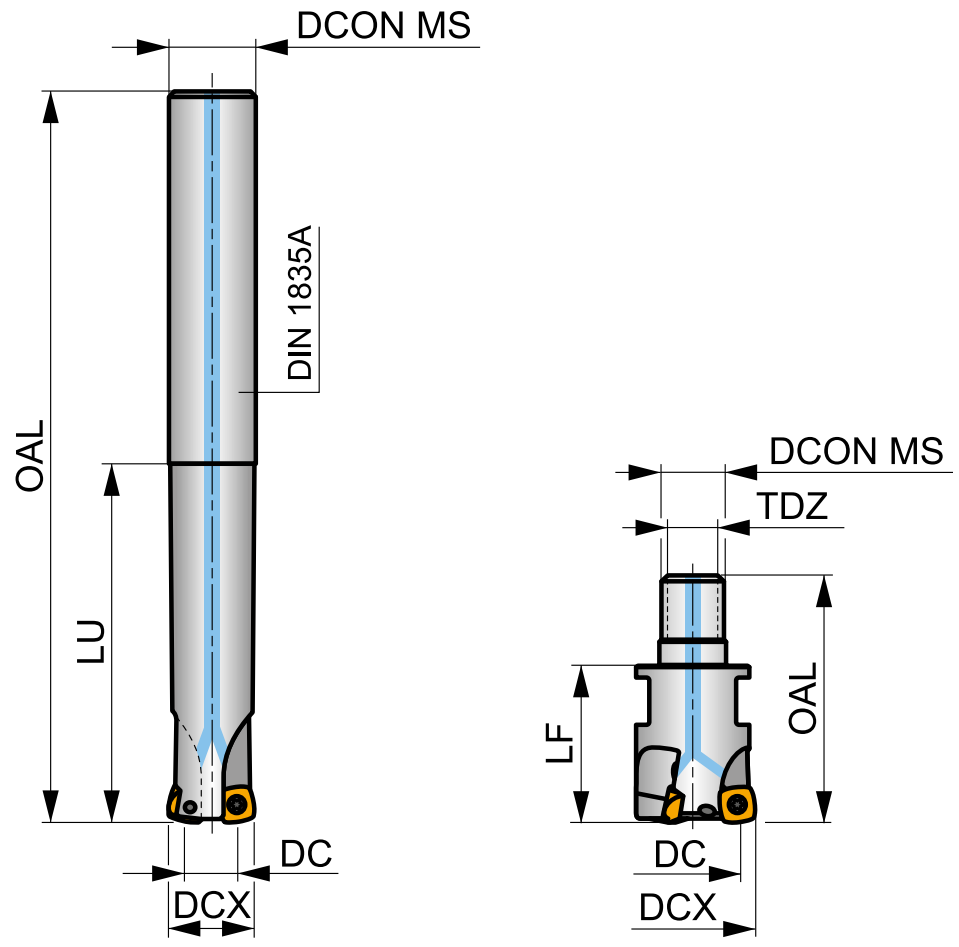



h_m 0.175 - 0.44



	Product	DCX [mm]	DC [mm]	OAL [mm]	DCON MS [mm]	LU [mm]	LF [mm]	TDZ	GAMF [°]	GAMP [°]			max.		kg		
DIN 1835A	16E2R030A16-SZD07	16	6	100	16	30	–	–	-5	8	2	–	47400	✓	0.13	GI201	C0350
	16E2R065A16-SZD07	16	6	145	16	65	–	–	-5	8	2	–	47400	✓	0.19	GI201	C0350
	20E3R040A20-SZD07	20	10	120	20	40	–	–	-5	8	3	–	42400	✓	0.25	GI201	C0350
	20E3R080A20-SZD07	20	10	165	20	80	–	–	-5	8	3	–	42400	✓	0.33	GI201	C0350
	25E3R050A25-SZD07	25	15	140	25	50	–	–	-5	8	3	–	37900	✓	0.47	GI201	C0350
	25E3R100A25-SZD07	25	15	190	25	100	–	–	-5	8	3	–	37900	✓	0.60	GI201	C0350
MODULAR	16E2R030M08-SZD07	16	6	48	8.5	–	30	M8	-5	8	2	–	–	✓	0.04	GI201	C0350
	20E3R030M10-SZD07	20	10	49	10.5	–	30	M10	-5	8	3	–	–	✓	0.08	GI201	C0350
	25E3R032M12-SZD07	25	15	54	12.5	–	32	M12	-5	8	3	–	–	✓	0.15	GI201	C0350
	25E4R032M12-SZD07	25	15	54	12.5	–	32	M12	-5	8	4	✓	–	✓	0.04	GI201	C0350
	32E4R040M16-SZD07	32	22	65	17	–	40	M16	-5	8	4	✓	–	✓	0.22	GI201	C0350

GI201	ZDCW 0703..

		Nm			
C0350	US 2205-T07P	0.9	M 2.2	5	Flag T07P

ZDCW 07

	IC [mm]	D1 [mm]	S [mm]
0703	6.800	2.60	3.18



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product		RE [mm]	P				M			K				N			S			H			
				vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]		vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]		vc [m/min]	f [mm/tooth]	ap [mm]
ZDCW 070304	M8310	0.4	◪	420	0.60	0.4	–	–	–	■	395	0.60	0.4	–	–	–	–	–	–	■	80	0.15	1.0
	M8325	0.4	◪	325	0.60	0.4	–	–	–		–	–	–	–	–	–	–	–	–		–	–	–
	M8345	0.4	◪	305	0.60	0.4	–	–	–		–	–	–	–	–	–	–	–	–		–	–	–



Special geometry for high feed machining.

a_e / DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
X.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	ZDCW 07
RE	0.4
BS	–

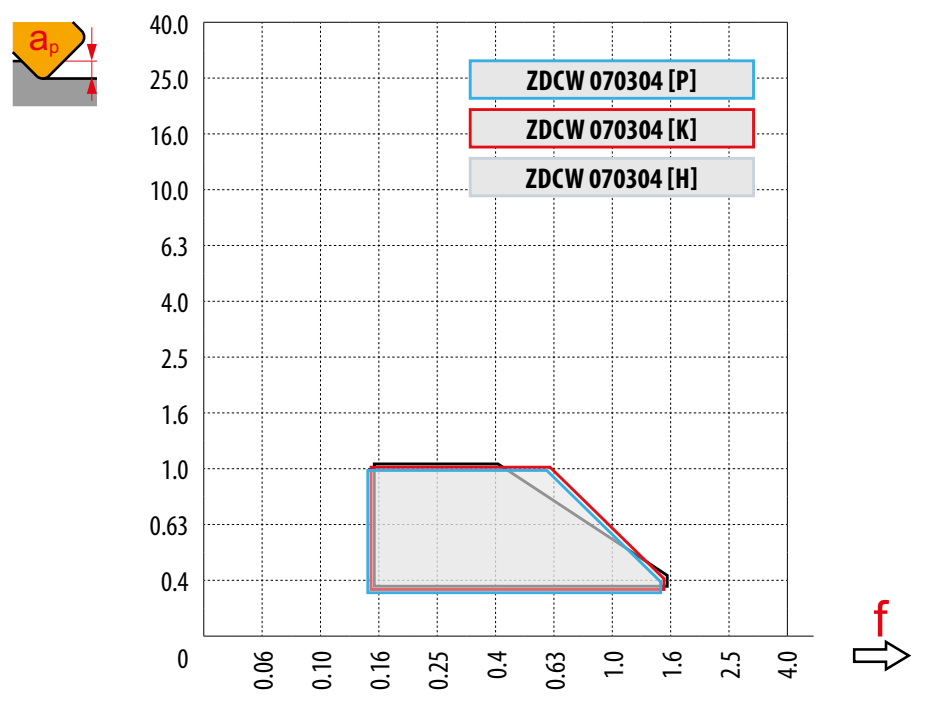

DCX	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
16	DEF	6.0	12.0	12.9	13.7	14.4	15.1	15.7	16.2	16.8
20		10.0	16.0	16.9	17.7	18.4	19.1	19.7	20.2	20.8
25		15.0	21.0	21.9	22.7	23.4	24.1	24.7	25.2	25.8
32		22.0	28.0	28.9	29.7	30.4	31.1	31.7	32.2	32.8
	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
	1 f	–	1.50	1.50	1.13	1.00	0.88	0.75	0.61	0.60



$$f_z = h_m \sqrt{\frac{2R_{ekv.}}{APMX}} \quad \text{[mm/tooth]}$$

Follow instructions provided for flat surface milling. When milling close to vertical surfaces, decrease feed per tooth (f_z) by 50 % to prevent vibrations and damage of the cutting edge.

DCX	max	f_{max}
16	5.6	0.12
20	5.6	0.15
25	5.6	0.17
32	5.6	0.17

HFC			
a_p	0.3	0.6	1.0
1 f	1.50	0.80	0.40

DCX	RPMX	APMX/l
16	7.8	1.0/9
20	9.7	1.0/7
25	4.9	1.0/13
32	2.8	1.0/22

HFC		
DCX	RPMX	APMX/l
16	0.5	0.75/100
20	0.3	0.40/100
25	0.2	0.20/100
32	0.1	0.05/100

DCX	DMIN	DMAX	SMAX DMIN	SMAX DMAX
16	21.0	32.0	0.10	0.40
20	29.0	40.0	0.10	0.30
25	39.0	50.0	0.15	0.25
32	53.0	64.0	0.10	0.15

DCX	a_p	f_{max}
16	0.05	0.12
20	0.05	0.15
25	0.05	0.17
32	0.05	0.17

DCX	µm	3	5	10	15	20	30	40	50	60	80	100
16	FE	0.438	0.566	0.800	0.980	1.131	1.386	1.600	1.789	1.960	2.263	2.530
20		0.490	0.632	0.894	1.095	1.265	1.549	1.789	2.000	2.191	2.530	2.828
25		0.548	0.707	1.000	1.225	1.414	1.732	2.000	2.236	2.449	2.828	3.162
32		0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578

i



	R	T
ZDCW 070304	1.70	0.60

P **K** **H**

PRAMET **S**

FEED ZD09 High-Feed Milling Cutter with Internal Coolant

Productive high-feed milling cutter utilising single-sided ZD.. 09 insert with 4 cutting edges and APMX of 1 mm. Internal coolant. Suited for a wide range of applications. Available in cylindrical, modular and arbor style, in range of Ø25 up to Ø66 mm. Body treated for longer tool life.

FEED ZD

APMX	1.0 mm



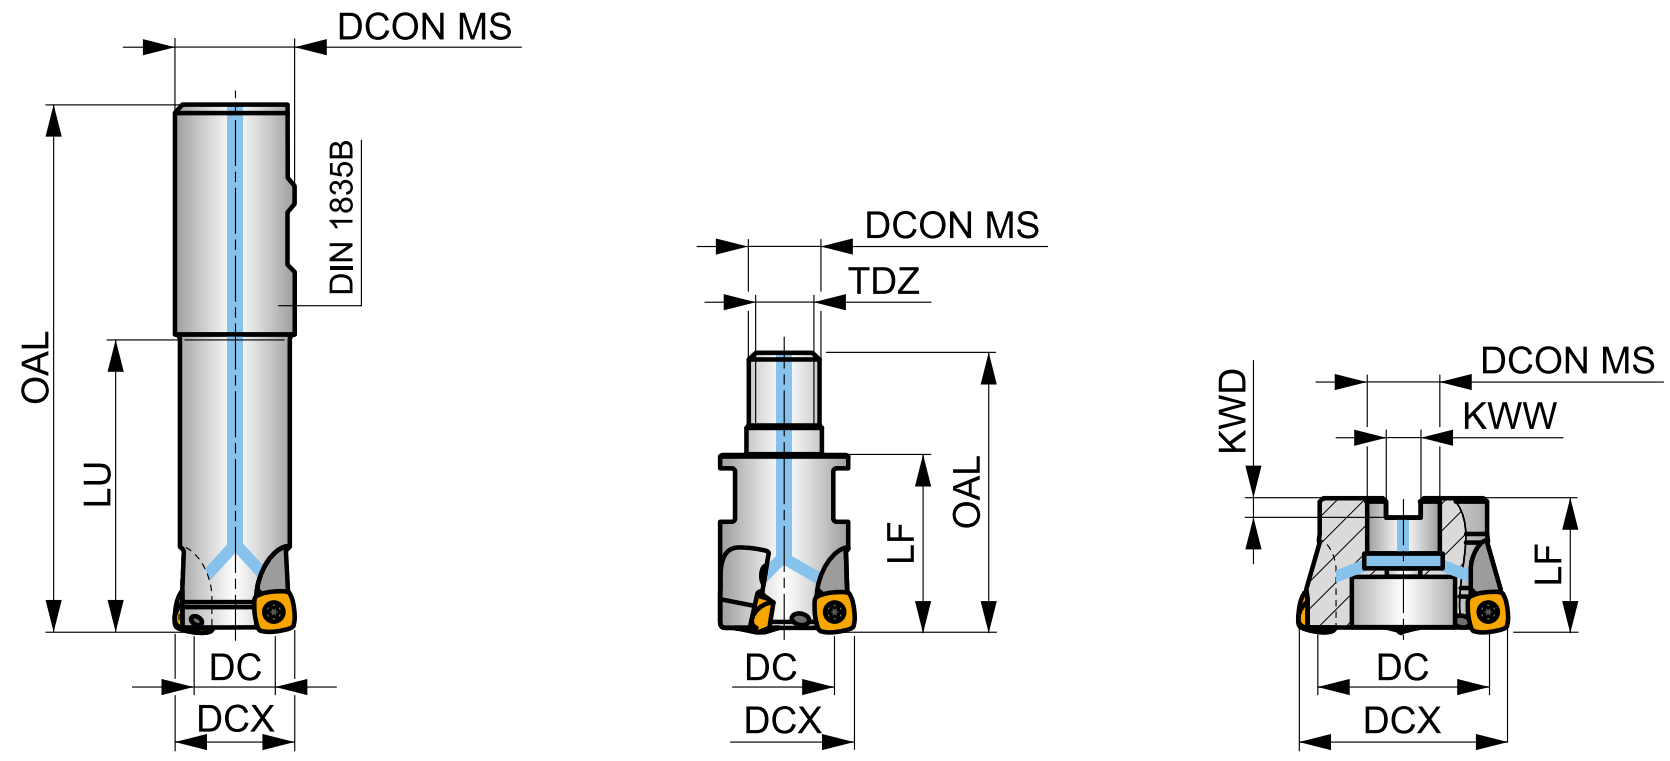

h_m 0.31 - 0.618

h_m 0.31 - 0.618

	Product	DCX [mm]	DC [mm]	OAL [mm]	DCON MS [mm]	LU [mm]	LF [mm]	TDZ	KWW [mm]	KWD [mm]	GAMF [°]	GAMP [°]			max.		kg		
DIN 1835B	25E2R080B25-SZD09-C	25	11.6	140	25	80	–	–	–	–	-6	10	2	–	22800	✓	0.49	GI191	SQ400
	25E2R140B25-SZD09-C	25	11.6	200	25	140	–	–	–	–	-6	10	2	–	22800	✓	0.63	GI191	SQ400
	25E2R240B25-SZD09-C	25	11.6	300	25	240	–	–	–	–	-6	10	2	–	22800	✓	0.90	GI191	SQ400
	32E2R080B32-SZD09-C	32	18.7	140	32	80	–	–	–	–	-6	10	2	–	20100	✓	0.80	GI191	SQ400
	32E2R140B32-SZD09-C	32	18.7	200	32	140	–	–	–	–	-6	10	2	–	20100	✓	1.07	GI191	SQ400
	32E2R240B32-SZD09-C	32	18.7	300	32	240	–	–	–	–	-6	10	2	–	20100	✓	1.57	GI191	SQ400
MODULAR	25E2R032M12-SZD09-C	25	11.6	54	12.5	–	32	M12	–	–	-6	10	2	–	–	✓	0.15	GI191	SQ400
	25E3R032M12-SZD09-C	25	11.6	54	12.5	–	32	M12	–	–	-6	10	3	–	–	✓	0.14	GI191	SQ400
	32E3R040M16-SZD09-C	32	18.7	63	17	–	40	M16	–	–	-6	10	3	–	–	✓	0.26	GI191	SQ400
	35E4R040M16-SZD09-C	35	21.7	63	17	–	40	M16	–	–	-6	10	4	✓	–	✓	0.22	GI191	SQ400
	42E4R040M16-SZD09-C	42	28.7	63	17	–	40	M16	–	–	-6	10	4	✓	–	✓	0.27	GI191	SQ400
ISO 6462 DIN 8030	40A03R-SM0ZD09-C	40	26.7	–	16	–	40	–	8.4	5.6	-6	10	3	–	18000	✓	0.36	GI191	SQ402
	40A04R-SM0ZD09-C	40	26.7	–	16	–	40	–	8.4	5.6	-6	10	4	✓	18000	✓	0.44	GI191	SQ402
	50A05R-SM0ZD09-C	50	36.7	–	22	–	40	–	10.4	6.4	-6	10	5	✓	16000	✓	0.43	GI191	SQ403
	52A05R-SM0ZD09-C	52	38.7	–	22	–	40	–	10.4	6.4	-6	10	5	✓	15700	✓	0.46	GI191	SQ403
	63A06R-SM0ZD09-C	63	49.7	–	22	–	40	–	10.4	6.4	-6	10	6	✓	14300	✓	0.60	GI191	SQ403
	66A06R-SM0ZD09-C	66	52.7	–	27	–	50	–	12	7	-6	10	6	✓	14000	✓	0.89	GI191	C0364

GI191	ZDCW 09T3..

		Nm						
C0364	US 3006-T09P	2.0	M 3	6	D-T07P/T09P	FG-15	HS 1230C	–
SQ400	US 3006-T09P	2.0	M 3	6	–	–	Flag T09P	–

SQ402	US 3006-T09P	2.0	M 3	6	D-T07P/T09P	FG-15	–	HS 0830C
SQ403	US 3006-T09P	2.0	M 3	6	D-T07P/T09P	FG-15	–	HS 1030C

ZDCW 09

PRAMET

	IC [mm]	D1 [mm]	S [mm]
09T3	9.525	3.40	3.97



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.



Special geometry for high feed machining.

Product	Grade	RE [mm]	P vc [m/min]	P f [mm/tooth]	P ap [mm]	M vc [m/min]	M f [mm/tooth]	M ap [mm]	K vc [m/min]	K f [mm/tooth]	K ap [mm]	N vc [m/min]	N f [mm/tooth]	N ap [mm]	S vc [m/min]	S f [mm/tooth]	S ap [mm]	H vc [m/min]	H f [mm/tooth]	H ap [mm]
ZDCW 09T304	**M8310**	0.4	◩ 320	1.00	0.6	–	–	–	■ 300	1.00	0.6	–	–	–	–	–	–	■ 60	0.15	1.0
	M8325	0.4	◩ 250	1.00	0.6	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	M8345	0.4	◩ 235	1.00	0.6	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

a_e / DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
x.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	ZDCW 09
RE	0.4
BS	–

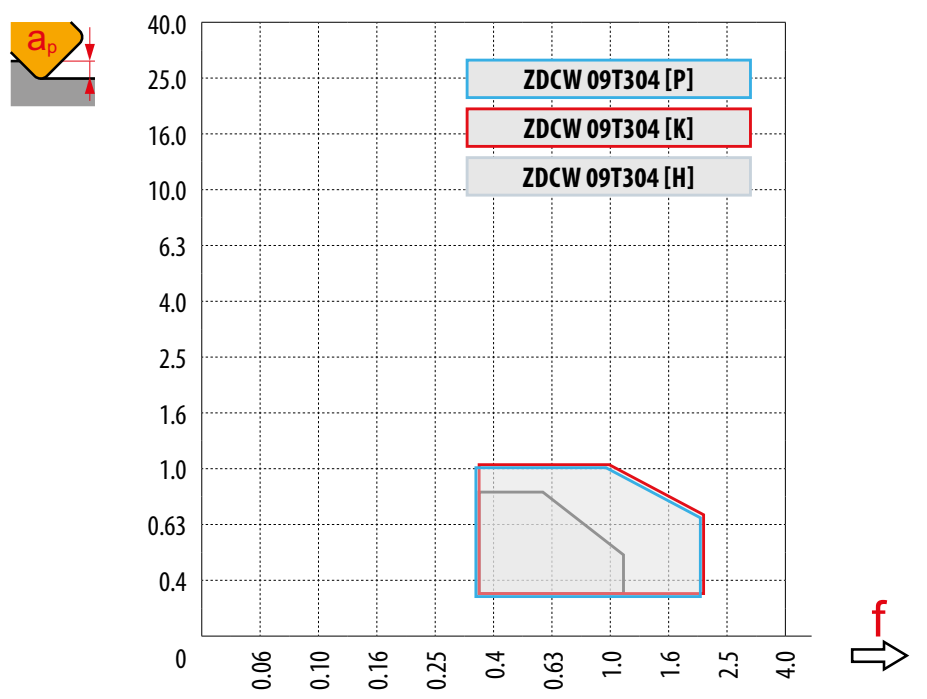

DCX	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
25		11.6	17.4	18.2	19.0	19.7	20.3	20.9	21.5	22.0
32		18.7	24.5	25.3	26.1	26.8	27.4	28.0	28.6	29.1
35		21,7	27,3	28,1	28,8	29,5	30,1	30,7	31,2	31,7
40		27.7	33.5	34.3	35.1	35.8	36.4	37.0	37.6	38.1
42	DEF	28,7	34,3	35,1	35,8	36,5	37,1	37,7	38,2	38,7
50		36,7	42,3	43,1	43,8	44,5	45,1	45,7	46,2	46,7
52		38,7	44,3	45,1	45,8	46,5	47,1	47,7	48,2	48,7
63		49,7	55,3	56,1	56,8	57,5	58,1	58,7	59,2	59,7
66		52,7	58,3	59,1	59,8	60,5	61,1	61,7	62,2	62,7
	a_p	0.00	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
	1 f	–	2.00	2.00	2.00	1.75	1.50	1.25	1.13	1.00



$$f_z = h_m \sqrt{\frac{2R_{ekv.}}{APMX}}$$ [mm/tooth]

Follow instructions provided for flat surface milling. When milling close to vertical surfaces, decrease feed per tooth (f_z) by 50 % to prevent vibrations and damage of the cutting edge.

DCX	max	f_{max}
25	7.7	0.15
32	7.7	0.17
40	7.7	0.20

	HFC		
a_p	0.3	0.6	1.0
1 f	2.00	1.50	1.00

			HFC	
DCX	RPMX	APMX/l	RPMX	APMX/l
25	12.0	1.0/6	0.9	1.00/65
32	7.5	1.0/11	0.5	0.75/100
40	3.6	1.0/17	0.4	0.55/100

DCX	**DMIN**	**DMAX**	SMAX DMIN	SMAX DMAX
25	35.0	50.0	0.45	1.00
32	49.0	64.0	0.45	0.85
40	65.0	80.0	0.50	0.85

DCX	a_p	f_{max}
25	0.15	0.15
32	0.15	0.17
40	0.15	0.20

DCX	µm	**3**	**5**	**10**	**15**	**20**	**30**	**40**	**50**	**60**	**80**	**100**
25	FE	0,548	0,707	1,000	1,225	1,414	1,732	2,000	2,236	2,449	2,828	3,162
32		0,620	0,800	1,131	1,386	1,600	1,960	2,263	2,530	2,771	3,200	3,578
35		0,648	0,837	1,183	1,449	1,673	2,049	2,366	2,646	2,898	3,347	3,742
40		0,693	0,894	1,265	1,549	1,789	2,191	2,530	2,828	3,098	3,578	4,000
42		0,710	0,917	1,296	1,587	1,833	2,245	2,592	2,898	3,175	3,666	4,099
52		0,790	1,020	1,442	1,766	2,040	2,498	2,884	3,225	3,533	4,079	4,561
63		0,869	1,122	1,587	1,944	2,245	2,750	3,175	3,550	3,888	4,490	5,020
66		0,890	1,149	1,625	1,990	2,298	2,814	3,250	3,633	3,980	4,596	5,138

i



	R	**T**
ZDCW 09T304	2.27	0.52

SZD12

P K H

PRAMET

S

FEED ZD12 High-Feed Milling Cutter with Internal Coolant

Highly productive high-feed milling cutter utilising single-sided ZD.. 12 insert with 4 cutting edges and APMX of 1.6 mm. Internal coolant. Suitable for a wide range of applications. Available in cylindrical, modular and arbor style, in range of Ø32 up to Ø80 mm. Body treated for longer tool life.

FEED ZD

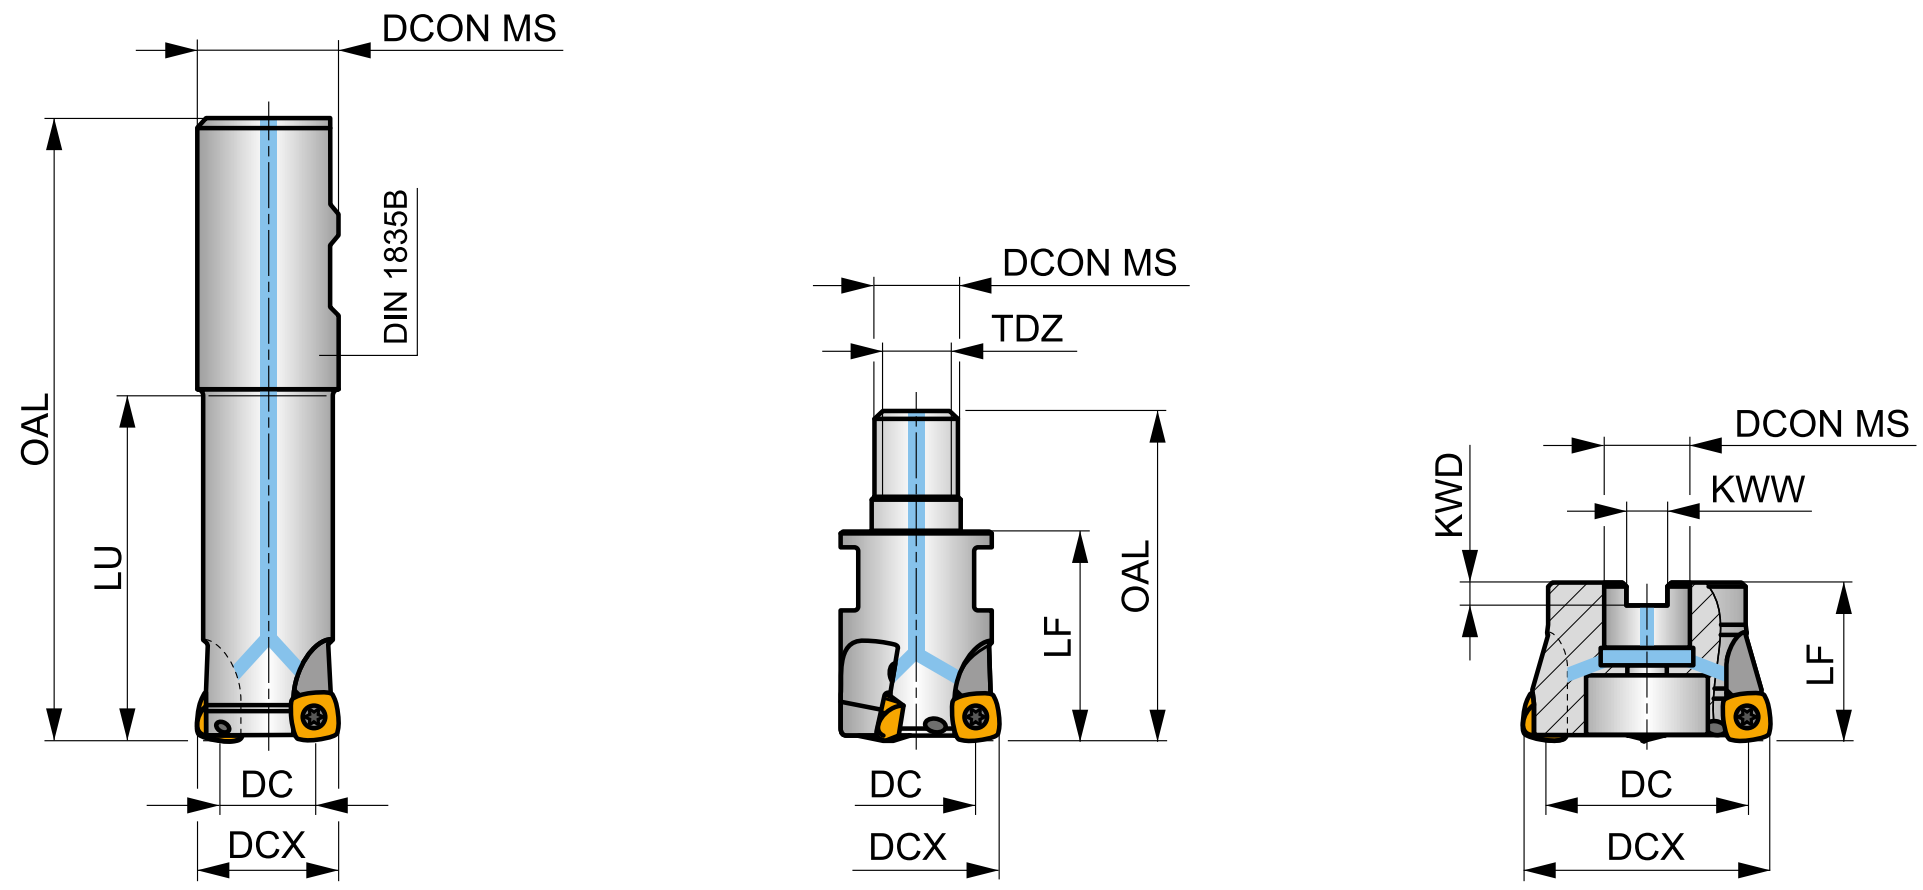

APMX	1.6 mm



h_m 0.46 - 0.925

h_m 0.46 - 0.925

	Product	DCX [mm]	DC [mm]	OAL [mm]	DCON MS [mm]	LU [mm]	LF [mm]	TDZ	KWW [mm]	KWD [mm]	GAMF [°]	GAMP [°]			max.		kg			
DIN 1835B	40E4R080B32-SZD12-C	40	22.5	140	32	80	–	–	–	–	-6	10	4	✓	15700	✓	0.78	GI192	SQ220	–
	40E4R140B32-SZD12-C	40	22.5	200	32	140	–	–	–	–	-6	10	4	✓	15700	✓	1.13	GI192	SQ220	–
MODULAR	32E3R040M16-SZD12-C	32	14.5	63	17	–	40	M16	–	–	-6	10	3	–	–	✓	0.24	GI192	SQ220	–
	40E4R040M16-SZD12-C	40	22.5	63	17	–	40	M16	–	–	-6	10	4	–	–	✓	0.23	GI192	SQ220	–
ISO 6462 DIN 8030	50A04R-SMOZD12-C	50	32.5	–	22	–	40	–	10.4	6.4	-6	10	4	✓	14000	✓	0.47	GI192	SQ033	–
	63A05R-SMOZD12-C	63	45.5	–	22	–	40	–	10.4	6.4	-6	10	5	✓	12500	✓	0.63	GI192	SQ033	–
	80A05R-SMOZD12-C	80	62.5	–	27	–	50	–	12	7	-6	10	5	✓	11100	✓	1.12	GI192	C0371	AC001

GI192	ZDEW 1204..

		Nm						
C0371	US 4011-T15P	3.5	M 4	10.6	D-T08P/T15P	FG-15	–	–
SQ033	US 4011-T15P	3.5	M 4	10.6	D-T08P/T15P	FG-15	–	HS 1030C
SQ220	US 4011-T15P	3.5	M 4	10.6	–	–	Flag T15P	–

AC001	KS 1230	K.FMH27

ZDEW 12

	IC	D1	S
	[mm]	[mm]	[mm]
1204	12.700	4.40	4.76



Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product		RE		P				M				K				N				S				H		
				vc	f	ap		vc	f	ap		vc	f	ap		vc	f	ap		vc	f	ap		vc	f	ap
		[mm]		[m/min]	[mm/tooth]	[mm]		[m/min]	[mm/tooth]	[mm]		[m/min]	[mm/tooth]	[mm]		[m/min]	[mm/tooth]	[mm]		[m/min]	[mm/tooth]	[mm]		[m/min]	[mm/tooth]	[mm]
ZDEW 120408	**M8310**	0.8	◪	270	1.00	1.0		–	–	–	■	255	1.00	1.0		–	–	–		–	–	–	■	50	0.15	1.0
	M8325	0.8	◪	205	1.00	1.0		–	–	–		–	–	–		–	–	–		–	–	–		–	–	–
	M8345	0.8	◪	195	1.00	1.0		–	–	–		–	–	–		–	–	–		–	–	–		–	–	–



Special geometry for high feed machining.

a_e / DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
X.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	ZDEW 12
RE	0.8
BS	–

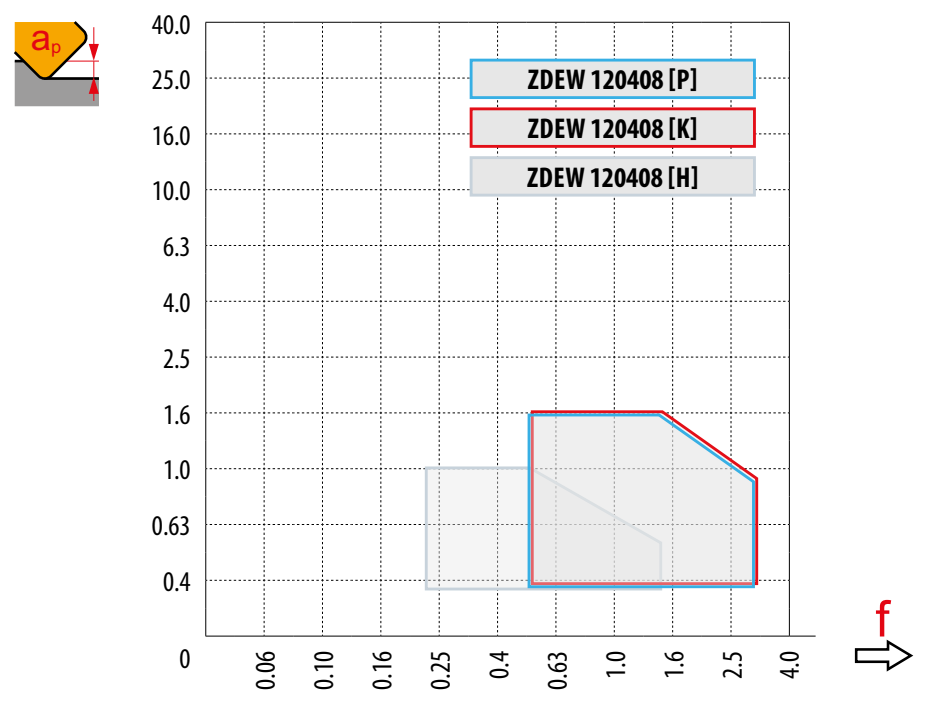

DCX	a_p	0.00	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.20	1.30	1.40	1.50	1.60
32	DEF	14.5	22.7	23.5	24.2	24.8	25.4	26.0	26.5	27.0	27.5	28.0	28.5	28.9
40		22.5	30.7	31.5	32.2	32.8	33.4	34.0	34.5	35.0	35.5	36.0	36.5	36.9
50		32.5	40.7	41.5	42.2	42.8	43.4	44.0	44.5	45.0	45.5	46.0	46.5	46.9
52		34.5	42.7	43.5	44.2	44.8	45.4	46.0	46.5	47.0	47.5	48.0	48.5	48.9
63		45.5	53.7	54.5	55.2	55.8	56.4	57.0	57.5	58.0	58.5	59.0	59.5	59.9
66		48.5	56.7	57.5	58.2	58.8	59.4	60.0	60.5	61.0	61.5	62.0	62.5	62.9
80		62.5	70.7	71.5	72.2	72.8	73.4	74.0	74.5	75.0	75.5	76.0	76.5	76.9
	a_p	0.00	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.20	1.30	1.40	1.50	1.60
	1 f	–	3.00	3.00	3.00	3.00	3.00	3.00	2.50	2.25	2.00	1.80	1.65	1.50



$$f_z = h_m \sqrt{\frac{2R_{ekv.}}{APMX}}$$ [mm/tooth]

Follow instructions provided for flat surface milling. When milling close to vertical surfaces, decrease feed per tooth (f_z) by 50 % to prevent vibrations and damage of the cutting edge.

DCX	max	f_{max}
32	10.0	0.15
40	10.0	0.17
50	10.0	0.20
52	10.0	0.20
63	10.0	0.20
66	10.0	0.20
80	10.0	0.25

	HFC		
a_p	**0.5**	**1.0**	**1.6**
1 f	3.00	2.00	1.50

			HFC	
DCX	RPMX	APMX/l	RPMX	APMX/l
32	10	1.6/11	1.2	1.60/78
40	5.5	1.6/18	0.7	1.10/100
50	3.3	1.6/29	0.5	0.75/100
52	3.1	1.6/31	0.5	0.75/100
63	2.2	1.6/43	0.3	0.40/100
66	2.0	1.6/47	0.3	0.40/100
80	1.5	1.6/63	0.2	0.20/100

DCX	DMIN	DMAX	SMAX DMIN	SMAX DMAX
32	44.0	64.0	0.75	1.60
40	60.0	80.0	0.75	1.50
50	80.0	100.0	0.80	1.35
52	84.0	104.0	0.80	1.35
63	106.0	126.0	0.70	1.00
66	112.0	132.0	0.70	1.00
80	140.0	160.0	0.65	0.85

DCX	a_p	f_{max}
32	0.25	0.15
40	0.25	0.17
50	0.25	0.20
52	0.25	0.20
63	0.25	0.20
66	0.25	0.20
80	0.25	0.25

DCX	µm	**3**	**5**	**10**	**15**	**20**	**30**	**40**	**50**	**60**	**80**	**100**
32	FE	0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578
40		0.693	0.894	1.265	1.549	1.789	2.191	2.530	2.828	3.098	3.578	4.000
50		0.775	1.000	1.414	1.732	2.000	2.449	2.828	3.162	3.464	4.000	4.472
52		0.790	1.020	1.442	1.766	2.040	2.498	2.884	3.225	3.533	4.079	4.561
63		0.869	1.122	1.587	1.944	2.245	2.750	3.175	3.550	3.888	4.490	5.020
66		0.890	1.149	1.625	1.990	2.298	2.814	3.250	3.633	3.980	4.596	5.138
80		0.980	1.265	1.789	2.191	2.530	3.098	3.578	4.000	4.382	5.060	5.657

i



	R	**T**
ZDEW 120408	3.52	0.64